

INSAFE PRO GRADE 0-V

Professional.
Protection.
Insafe® Pro.



SAFES SINCE 1840



Tested.
Certified.
Proven.
Safe™



Featured safe is Grade I Size 100

Independent Testing & Certification.

All Insafe Pro Grade Safes are independently tested and certified. The appropriate certification plate may be found in the inside of the safes door. This is a permanent guarantee.



AiS Approved.

The Insafe range of safes are approved by the Association of Insurance Surveyors (AiS). The AiS is a highly respected body of risk control experts working in the UK insurance market.



Contents.

SAFE GRADE	CASH RATING	VALUABLES RATING	PAGE NO.
0	£6,000	£60,000	4
I	£10,000	£100,000	6
II	£17,500	£175,000	8
III	£35,000	£350,000	10
IV	£60,000	£600,000	12
V	£100,000	£1 million	14

*Ratings: Cash and valuable ratings are for guidance only.

Cash and valuable ratings are for guidance only for the commercial sector in an unsupported environment. However, this is indicative overnight cash cover only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different cash cover values to the ones recommended in this document. In any case we recommend that you consult your insurer.

© 2018 - The Insafe logo is a registered trade mark of Insafe International Limited which includes the Pantone 268C purple square. Detail, imagery and specifications contained within this publication may vary. All dimensions, weights and capacities are approximate.



Assessed to ISO 9001 & ISO 14001
Cert/LPCB ref. 1106



MEMBER



**RI
SE**



Featured safe is
Grade 0 Size 240



Insafe® Pro Grade 0


Ratings* : Cash £6,000 • Valuables £60,000

- Tested and Certified by VdS - Germany according to EN 1143-1 Grade 0 for Burglary Protection
- Certified by RISE Research Institute, Sweden for Fire Resistance - 60P
- Approved by the Association of Insurance Surveyors (AiS)
- Standard Safe comes with a High Security Double Bitted Class A Key Lock as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination Locks Certified as per EN 1300 standards

SIZE	Model	External Size HxWxD			Internal Size HxWxD			Overall Width G	Overall Depth H	Door Radius J	Volume	Weight
		A	B	C	D	E	F					
40	INP-G0-40	455	455	500	355	355	310	845	923	405	39 Litres	124 Kg
50	INP-G0-50	585	455	500	485	355	310	845	923	405	53 Litres	148 Kg
100	INP-G0-100	685	520	615	585	420	425	975	1103	470	105 Litres	207 Kg
140	INP-G0-140	800	550	640	700	450	450	1035	1158	500	140 Litres	247 Kg
200	INP-G0-200	1000	610	615	900	510	425	1155	1193	560	195 Litres	308 Kg
240	INP-G0-240	1200	610	615	1100	510	425	1155	1193	560	238 Litres	361 Kg
300	INP-G0-300	1400	610	615	1300	510	425	1155	1193	560	281 Litres	410 Kg
250	INP-G0-250	1600	610	520	1500	510	330	1155	1098	560	252 Litres	421 Kg
500	INP-G0-500	1700	770	660	1600	670	470	1475	1398	720	503 Litres	612 Kg

Please add 40mm for the depth of the handle and hinges

*Ratings: see note on page 3

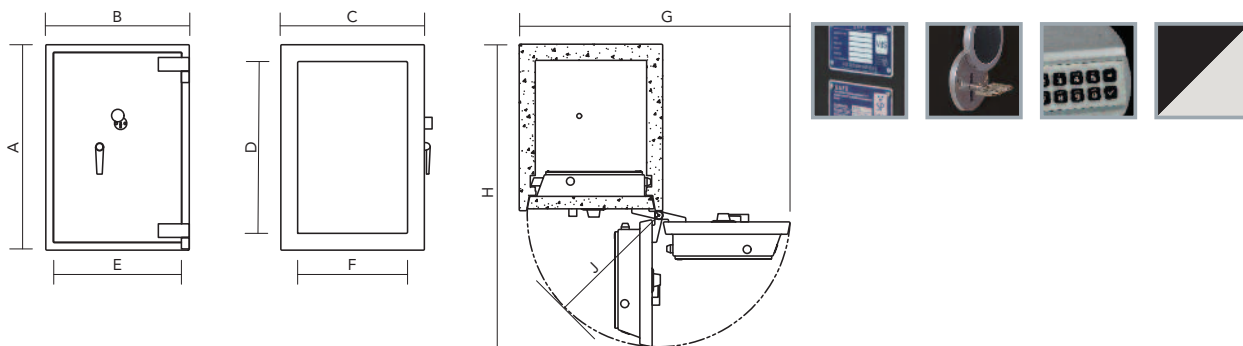



**RI
SE**



Featured safe is
Grade I Size 240



Insafe® Pro Grade I


Ratings* : Cash £10,000 • Valuables £100,000

- Tested and Certified by VdS - Germany according to EN 1143-1 Grade I for Burglary Protection
- Certified by RISE Research Institute, Sweden for Fire Resistance - 60P
- Approved by the Association of Insurance Surveyors (AiS)
- Standard Safe comes with a High Security Double Bitted Class A Key Lock as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination Locks Certified as per EN 1300 standards

SIZE	Model	External Size HxWxD			Internal Size HxWxD			Overall Width G	Overall Depth H	Door Radius J	Volume	Weight
		A	B	C	D	E	F					
20	INP-G1-20	455 x 405 x 370 mm			355 x 305 x 180 mm			745 mm	743 mm	355 mm	19.5 Litres	97 Kg
40	INP-G1-40	455 x 455 x 500 mm			355 x 355 x 310 mm			845 mm	923 mm	405 mm	39 Litres	124 Kg
50	INP-G1-50	585 x 455 x 500 mm			485 x 355 x 310 mm			845 mm	923 mm	405 mm	53 Litres	148 Kg
100	INP-G1-100	685 x 520 x 615 mm			585 x 420 x 425 mm			975 mm	1103 mm	470 mm	105 Litres	207 Kg
140	INP-G1-140	800 x 550 x 640 mm			700 x 450 x 450 mm			1035 mm	1158 mm	500 mm	140 Litres	247 Kg
150	INP-G1-150	800 x 610 x 615 mm			700 x 510 x 425 mm			1155 mm	1193 mm	560 mm	151 Litres	260 Kg
200	INP-G1-200	1000 x 610 x 615 mm			900 x 510 x 425 mm			1155 mm	1193 mm	560 mm	195 Litres	308 Kg
240	INP-G1-240	1200 x 610 x 615 mm			1100 x 510 x 425 mm			1155 mm	1193 mm	560 mm	238 Litres	361 Kg
300	INP-G1-300	1400 x 610 x 615 mm			1300 x 510 x 425 mm			1155 mm	1193 mm	560 mm	281 Litres	410 Kg
250	INP-G1-250	1600 x 610 x 520 mm			1500 x 510 x 330 mm			1155 mm	1098 mm	560 mm	252 Litres	421 Kg
500	INP-G1-500	1700 x 770 x 660 mm			1600 x 670 x 470 mm			1475 mm	1398 mm	720 mm	503 Litres	612 Kg

Please add 40mm for the depth of the handle and hinges

★Ratings: see note on page 3

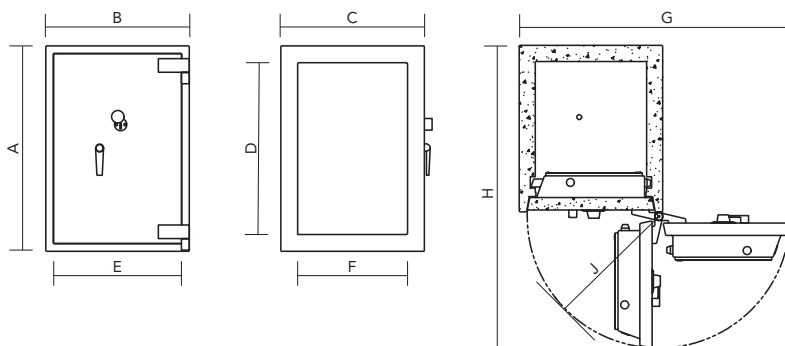



**RI
SE**



Featured safe is
Grade II Size 240



Insafe® Pro Grade II


Ratings* : Cash £17,500 • Valuables £175,000

- Tested and Certified by VdS - Germany according to EN 1143-1 Grade II for Burglary Protection
- Certified by RISE Research Institute, Sweden for Fire Resistance - 60P
- Approved by the Association of Insurance Surveyors (AiS)
- Standard Safe comes with a High Security Double Bitted Class A Key Lock as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination Locks Certified as per EN 1300 standards

SIZE	Model	External Size HxWxD			Internal Size HxWxD			Overall Width G	Overall Depth H	Door Radius J	Volume	Weight
		A	B	C	D	E	F					
40	INP-G2-40	485	485	533	355	355	310	905	987	435	39 Litres	182 Kg
50	INP-G2-50	615	485	533	485	355	310	905	987	435	53 Litres	200 Kg
100	INP-G2-100	715	550	648	585	420	425	1035	1167	500	105 Litres	284 Kg
140	INP-G2-140	830	580	673	700	450	450	1095	1222	530	140 Litres	339 Kg
150	INP-G2-150	830	640	648	700	510	425	1215	1257	590	151 Litres	356 Kg
200	INP-G2-200	1030	640	648	900	510	425	1215	1257	590	195 Litres	407 Kg
240	INP-G2-240	1230	640	648	1100	510	425	1215	1257	590	238 Litres	471 Kg
300	INP-G2-300	1430	640	648	1300	510	425	1215	1257	590	281 Litres	532 Kg
250	INP-G2-250	1630	640	553	1500	510	330	1215	1162	590	252 Litres	575 Kg
500	INP-G2-500	1730	800	693	1600	670	470	1535	1462	750	503 Litres	738 Kg

Please add 40mm for the depth of the handle and hinges

*Ratings: see note on page 3

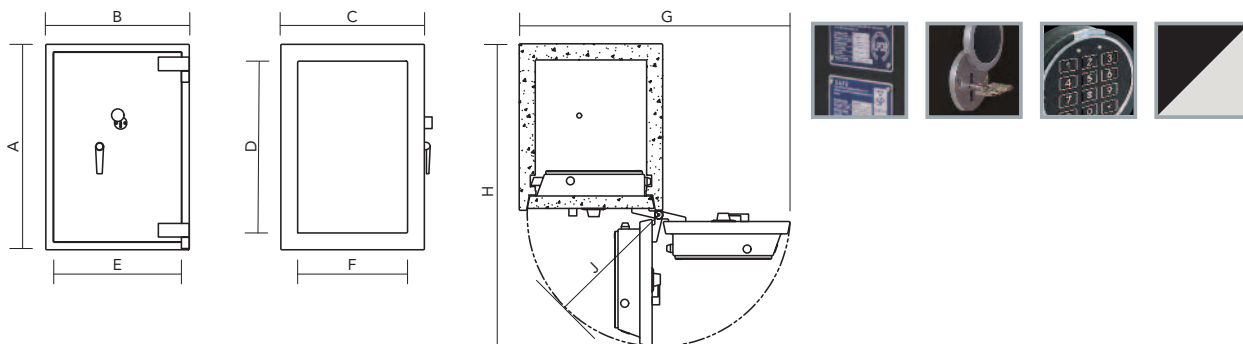



**RI
SE**



Featured safe is
Grade III Size 240



Insafe® Pro Grade III


Ratings* : Cash £35,000 • Valuables £350,000

- Tested and Certified by VdS - Germany according to EN 1143-1 Grade III for Burglary Protection
- Certified by RISE Research Institute, Sweden for Fire Resistance - 60P
- Approved by the Association of Insurance Surveyors (AiS)
- Standard Safe comes with a High Security Double Bitted Class B Key Lock as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination Locks Certified as per EN 1300 standards

SIZE	Model	External Size HxWxD			Internal Size HxWxD			Overall Width G	Overall Depth H	Door Radius J	Volume	Weight
		A	B	C	D	E	F					
40	INP-G3-40	485	485	533	355	355	310	905	987	435	39 Litres	238 Kg
50	INP-G3-50	615	485	533	485	355	310	905	987	435	53 Litres	280 Kg
100	INP-G3-100	715	550	648	585	420	425	1035	1167	500	105 Litres	385 Kg
140	INP-G3-140	830	580	673	700	450	450	1095	1222	530	140 Litres	455 Kg
150	INP-G3-150	830	640	648	700	510	425	1215	1257	590	151 Litres	475 Kg
200	INP-G3-200	1030	640	648	900	510	425	1215	1257	590	195 Litres	569 Kg
240	INP-G3-240	1230	640	648	1100	510	425	1215	1257	590	238 Litres	666 Kg
300	INP-G3-300	1430	640	648	1300	510	425	1215	1257	590	281 Litres	758 Kg
500	INP-G3-500	1730	800	693	1600	670	470	1535	1462	750	503 Litres	1086 Kg

Please add 40mm for the depth of the handle and hinges

*Ratings: see note on page 3

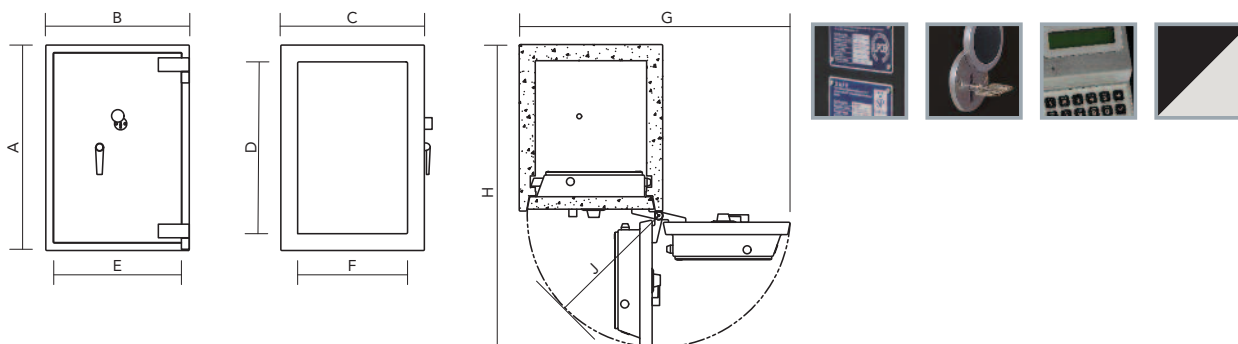



**RI
SE**



Featured safe is
Grade IV CD
Size 270

Insafe

Insafe® Pro Grade IV CD


Ratings* : Cash £60,000 • Valuables £600,000

- Tested and Certified by VdS - Germany according to EN 1143-1 Grade IV for Burglary Protection
- Certified by RISE Research Institute, Sweden for Fire Resistance - 90P
- Approved by the Association of Insurance Surveyors (AiS)
- Standard Safe comes fitted with Two High Security Double Bitted Class B Key Locks as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination Locks Certified as per EN 1300 standards

SIZE	Model	External Size HxWxD			Internal Size HxWxD			Overall Width G	Overall Depth H	Door Radius J	Volume	Weight
		A	B	C	D	E	F					
130	INP-G4-130	790 x 690 x 730 mm			600 x 500 x 450 mm			1271 mm	1357 mm	609 mm	135 Litres	705 Kg
200	INP-G4-200	1090 x 690 x 730 mm			900 x 500 x 450 mm			1271 mm	1357 mm	609 mm	202 Litres	906 Kg
270	INP-G4-270	1390 x 690 x 730 mm			1200 x 500 x 450 mm			1271 mm	1357 mm	609 mm	270 Litres	1075 Kg
320	INP-G4-320	1590 x 690 x 730 mm			1400 x 500 x 450 mm			1271 mm	1357 mm	609 mm	315 Litres	1195 Kg
600	INP-G4-600	1890 x 940 x 730 mm			1700 x 750 x 450 mm			1771 mm	1607 mm	859 mm	573 Litres	1685 Kg
700	INP-G4-700	1890 x 940 x 830 mm			1700 x 750 x 550 mm			1771 mm	1707 mm	859 mm	701 Litres	1846 Kg

Please add 40mm for the depth of the handle and hinges

★Ratings: see note on page 3

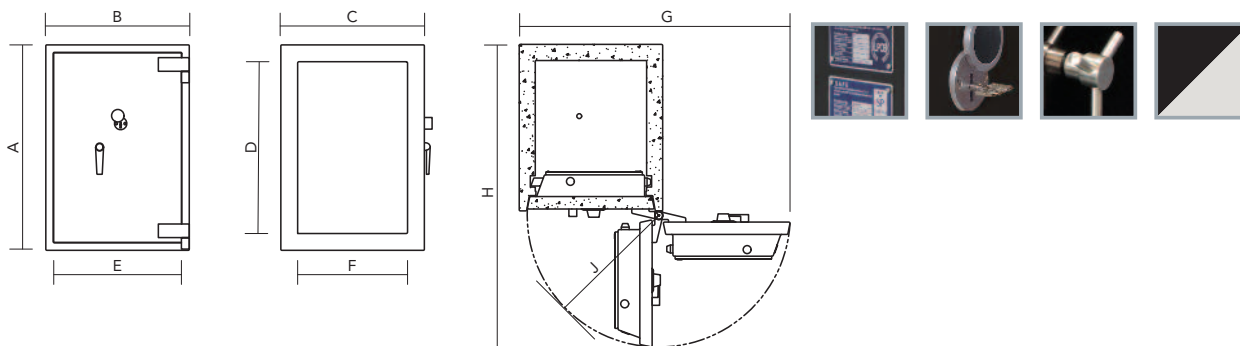



**RI
SE**



insafe



Featured safe is
Grade V CD
Size 270

Insafe® Pro Grade V CD


Ratings* : Cash £100,000 • Valuables £1,000,000

- Tested and Certified by VdS - Germany according to EN 1143-1 Grade V for Burglary Protection
- Certified by RISE Research Institute, Sweden for Fire Resistance - 90P
- Approved by the Association of Insurance Surveyors (AiS)
- Standard Safe comes fitted with Two High Security Double Bitted Class B Key Locks as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination Locks Certified as per EN 1300 standards

SIZE	Model	External Size HxWxD			Internal Size HxWxD			Overall Width G	Overall Depth H	Door Radius J	Volume	Weight
		A	B	C	D	E	F					
130	INP-G5-130	790 x 690 x 730 mm			600 x 500 x 450 mm			1271 mm	1357 mm	609 mm	135 Litres	720 Kg
200	INP-G5-200	1090 x 690 x 730 mm			900 x 500 x 450 mm			1271 mm	1357 mm	609 mm	202 Litres	924 Kg
270	INP-G5-270	1390 x 690 x 730 mm			1200 x 500 x 450 mm			1271 mm	1357 mm	609 mm	270 Litres	1097 Kg
320	INP-G5-320	1590 x 690 x 730 mm			1400 x 500 x 450 mm			1271 mm	1357 mm	609 mm	315 Litres	1223 Kg
600	INP-G5-600	1890 x 940 x 730 mm			1700 x 750 x 450 mm			1771 mm	1607 mm	859 mm	573 Litres	1708 Kg
700	INP-G5-700	1890 x 940 x 830 mm			1700 x 750 x 550 mm			1771 mm	1707 mm	859 mm	701 Litres	1898 Kg

Please add 40mm for the depth of the handle and hinges

★Ratings: see note on page 3

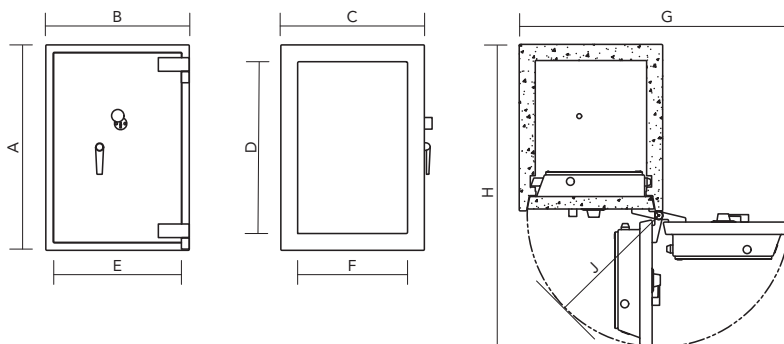

INSAFE.COM



INSPIRED SECURITY

Insafe International Limited 2 Mount Ephraim Royal Tunbridge Wells Kent TN4 8AS UK
Telephone +44 (0)1892 533 000 • sales@insafe.com