

Who says **YOU** can't have it all?



offers a wide range
of coated and stainless steel
gas connectors to fit all your needs

- CSA approved
- Double-corrugated
for extra flexibility
- Plated steel end fittings
- In stock for
immediate shipping
- Since 1931

"Preferred by Professionals"





Gas Connectors · Gas Ball Valves · Water Connectors

Division of *elbi* of America


3/8" O.D. FLEXIBLE GAS CONNECTORS

3/8" O.D. Flexible Gas Connectors are used primarily for single-burner, low B.T.U. applications:

- Gas Clothes Dryers (Check your local codes; some states require 1/2".)
- Space Heaters, Wall Heaters and Gas Logs.
- Available in stainless steel and yellow poly-coated stainless steel.



01 = Un-Coated Stainless Steel
01-Y = Yellow Poly-Coated



End Fitting Description	3/8"OD (1/4"ID) TUBING WITH 3/8" FLARE NUTS							
	12"	18"	24"	30"	36"	48"	60"	72"
NUT x NUT	01-312	01-318	01-324	01-330	01-336	01-348	01-360	01-372
	01-Y312	01-Y318	01-Y324	01-Y330	01-Y336	01-Y348	01-Y360	01-Y372
1/2" FIP x 1/2" MIP	01-312-01	01-318-01	01-324-01	01-330-01	01-336-01	01-348-01	01-360-01	01-372-01
	01-Y312-01	01-Y318-01	01-Y324-01	01-Y330-01	01-Y336-01	01-Y348-01	01-Y360-01	01-Y372-01
1/2" MIP x 1/2" MIP	01-312-02	01-318-02	01-324-02	01-330-02	01-336-02	01-348-02	01-360-02	01-372-02
	01-Y312-02	01-Y318-02	01-Y324-02	01-Y330-02	01-Y336-02	01-Y348-02	01-Y360-02	01-Y372-02
1/2" MIP x 3/8" FIP	01-312-03	01-318-03	01-324-03	01-330-03	01-336-03	01-348-03	01-360-03	01-372-03
	01-Y312-03	01-Y318-03	01-Y324-03	01-Y330-03	01-Y336-03	01-Y348-03	01-Y360-03	01-Y372-03
1/2" MIP x NUT	01-312-40	01-318-40	01-324-40	01-330-40	01-336-40	01-348-40	01-360-40	01-372-40
	01-Y312-40	01-Y318-40	01-Y324-40	01-Y330-40	01-Y336-40	01-Y348-40	01-Y360-40	01-Y372-40
3/8" FIP x NUT	01-312-43	01-318-43	01-324-43	01-330-43	01-336-43	01-348-43	01-360-43	01-372-43
	01-Y312-43	01-Y318-43	01-Y324-43	01-Y330-43	01-Y336-43	01-Y348-43	01-Y360-43	01-Y372-43
1/2" MIP x 1/2" FIP STRAIGHT VALVE	01-312-70	01-318-70	01-324-70	01-330-70	01-336-70	01-348-70	01-360-70	01-372-70
	01-Y312-70	01-Y318-70	01-Y324-70	01-Y330-70	01-Y336-70	01-Y348-70	01-Y360-70	01-Y372-70
1/2" MIP x 1/2" FIP ANGLE VALVE	01-312-60G	01-318-60G	01-324-60G	01-330-60G	01-336-60G	01-348-60G	01-360-60G	01-372-60G
	01-Y312-60G	01-Y318-60G	01-Y324-60G	01-Y330-60G	01-Y336-60G	01-Y348-60G	01-Y360-60G	01-Y372-60G

Angle



01-380G

Straight



01-387



3/8" Flare Connector End Fittings

- 01-395: 3/8" Flare x 3/8" Male Pipe
- 01-396: 3/8" Flare x 1/2" Male Pipe (Inside tapped 3/8")
- 01-390: 3/8" Flare x 3/8" Female Pipe
- 01-392: 3/8" Flare x 1/2" Female Pipe
- 01-399: 3/8" Flare x 3/8" Female Pipe ELBOW
- 01-398: 3/8" Flare x 1/2" Female Pipe ELBOW


3/8" Flare Gas Valves

- 01-380G Angle Gas Valve: 3/8" Flare x 1/2" Female Pipe
- 01-387 Straight Gas Valve: 3/8" Flare x 1/2" Female Pipe

1/2" O.D. FLEXIBLE GAS CONNECTORS


1/2" O.D. Flexible Gas Connectors are used for most normal gas appliance installations

- Forced Air Heaters
- Water Heaters (Storage Type)
- Clothes Dryers (Where Required)
- Drop-In Cook Tops
- Built in Ovens
- Gas Ranges (Low B.T.U.)



01 = Un-Coated Stainless Steel

01-Y = Yellow Poly-Coated



End Fitting Description

1/2" OD (3/8" ID) TUBING WITH 1/2" FLARE NUTS

	12"	18"	24"	30"	36"	48"	60"	72"
NUT x NUT	01-412	01-418	01-424	01-430	01-436	01-448	01-460	01-472
	01-Y412	01-Y418	01-Y424	01-Y430	01-Y436	01-Y448	01-Y460	01-Y472
1/2" FIP x 1/2" MIP	01-412-01	01-418-01	01-424-01	01-430-01	01-436-01	01-448-01	01-460-01	01-472-01
	01-Y412-01	01-Y418-01	01-Y424-01	01-Y430-01	01-Y436-01	01-Y448-01	01-Y460-01	01-Y472-01
1/2" MIP x 1/2" MIP	01-412-02	01-418-02	01-424-02	01-430-02	01-436-02	01-448-02	01-460-02	01-472-02
	01-Y412-02	01-Y418-02	01-Y424-02	01-Y430-02	01-Y436-02	01-Y448-02	01-Y460-02	01-Y472-02
1/2" MIP x 3/8" FIP	01-412-03	01-418-03	01-424-03	01-430-03	01-436-03	01-448-03	01-460-03	01-472-03
	01-Y412-03	01-Y418-03	01-Y424-03	01-Y430-03	01-Y436-03	01-Y448-03	01-Y460-03	01-Y472-03
1/2" MIP x NUT	01-412-40	01-418-40	01-424-40	01-430-40	01-436-40	01-448-40	01-460-40	01-472-40
	01-Y412-40	01-Y418-40	01-Y424-40	01-Y430-40	01-Y436-40	01-Y448-40	01-Y460-40	01-Y472-40
3/8" FIP x NUT	01-412-43	01-418-43	01-424-43	01-430-43	01-436-43	01-448-43	01-460-43	01-472-43
	01-Y412-43	01-Y418-43	01-Y424-43	01-Y430-43	01-Y436-43	01-Y448-43	01-Y460-43	01-Y472-43
1/2" MIP x 1/2" FIP STRAIGHT VALVE	01-412-70	01-418-70	01-424-70	01-430-70	01-436-70	01-448-70	01-460-70	01-472-70
	01-Y412-70	01-Y418-70	01-Y424-70	01-Y430-70	01-Y436-70	01-Y448-70	01-Y460-70	01-Y472-70
1/2" MIP x 1/2" FIP ANGLE VALVE	01-412-60G	01-418-60G	01-424-60G	01-430-60G	01-436-60G	01-448-60G	01-460-60G	01-472-60G
	01-Y412-60G	01-Y418-60G	01-Y424-60G	01-Y430-60G	01-Y436-60G	01-Y448-60G	01-Y460-60G	01-Y472-60G

Angle



01-480G

Straight



01-487
01-488



1/2" Flare Connector End Fittings

- 01-495: 1/2" Flare x 3/8" Male Pipe
- 01-496: 1/2" Flare x 1/2" Male Pipe (Inside tapped 3/8")
- 01-497: 1/2" Flare x 3/4" Male Pipe (Inside tapped 1/2")
- 01-490: 1/2" Flare x 3/8" Female Pipe
- 01-492: 1/2" Flare x 1/2" Female Pipe
- 01-493: 1/2" Flare x 3/4" Female Pipe
- 01-499: 1/2" Flare x 3/8" Female Pipe ELBOW
- 01-498: 1/2" Flare x 1/2" Female Pipe ELBOW

1/2" Flare Gas Valves

- 01-480G Angle Gas Valve: 1/2" Flare x 1/2" Female Pipe
- 01-487 Straight Gas Valve: 1/2" Flare x 1/2" Female Pipe
- 01-488 Straight Gas Valve: 1/2" Flare x 3/4" Female Pipe




Division of *elbi* of America ▪ Tel: 800-242-7769 ▪ Fax: 800-662-7769 ▪ www.arrowindustries.com

4-2019


A-3

5/8" O.D. FLEXIBLE GAS CONNECTORS

5/8" O.D. Flexible Gas Connectors are used for higher B.T.U. applications.
Gas Ranges (Check B.T.U. Rating) High Capacity Forced Air Furnaces



01 = Un-Coated Stainless Steel
01-Y = Yellow Poly-Coated

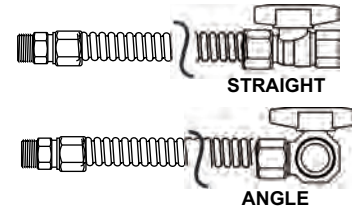

NOTE: As a safety measure, the Flare nuts on 5/8" O.D. Gas Connectors are 15/16" fine thread to prevent connection directly to 1/2" pipe thread.

5/8"OD (1/2"ID) TUBING WITH 15/16" FLARE NUTS

End Fitting Description	12"	18"	24"	30"	36"	48"	60"	72"
NUT X NUT	01-612	01-618	01-624	01-630	01-636	01-648	01-660	01-672
	01-Y612	01-Y618	01-Y624	01-Y630	01-Y636	01-Y648	01-Y660	01-Y672
1/2" FIP x 1/2" MIP	01-612-01	01-618-01	01-624-01	01-630-01	01-636-01	01-648-01	01-660-01	01-672-01
	01-Y612-01	01-Y618-01	01-Y624-01	01-Y630-01	01-Y636-01	01-Y648-01	01-Y660-01	01-Y672-01
1/2" MIP x 1/2" MIP	01-612-02	01-618-02	01-624-02	01-630-02	01-636-02	01-648-02	01-660-02	01-672-02
	01-Y612-02	01-Y618-02	01-Y624-02	01-Y630-02	01-Y636-02	01-Y648-02	01-Y660-02	01-Y672-02
1/2" MIP x 3/4" MIP	01-612-07	01-618-07	01-624-07	01-630-07	01-636-07	01-648-07	01-660-07	01-672-07
	01-Y612-07	01-Y618-07	01-Y624-07	01-Y630-07	01-Y636-07	01-Y648-07	01-Y660-07	01-Y672-07
1/2" MIP x 3/4" FIP	01-612-08	01-618-08	01-624-08	01-630-08	01-636-08	01-648-08	01-660-08	01-672-08
	01-Y612-08	01-Y618-08	01-Y624-08	01-Y630-08	01-Y636-08	01-Y648-08	01-Y660-08	01-Y672-08
3/4" MIP x 3/4" FIP	01-612-28	01-618-28	01-624-28	01-630-28	01-636-28	01-648-28	01-660-28	01-672-28
	01-Y612-28	01-Y618-28	01-Y624-28	01-Y630-28	01-Y636-28	01-Y648-28	01-Y660-28	01-Y672-28
1/2" MIP x NUT	01-612-40	01-618-40	01-624-40	01-630-40	01-636-40	01-648-40	01-660-40	01-672-40
	01-Y612-40	01-Y618-40	01-Y624-40	01-Y630-40	01-Y636-40	01-Y648-40	01-Y660-40	01-Y672-40
1/2" MIP x 3/4" FIP ANGLE VALVE	01-612-90G	01-618-90G	01-624-90G	01-630-90G	01-636-90G	01-648-90G	01-660-90G	01-672-90G
	01-Y612-90G	01-Y618-90G	01-Y624-90G	01-Y630-90G	01-Y636-90G	01-Y648-90G	01-Y660-90G	01-Y672-90G

Angle



01-680G

Straight



01-687
01-688



15/16" Flare Connector End Fittings

01-696: 15/16" Flare x 1/2" Male Pipe (Inside tapped 3/8")



01-697: 15/16" Flare x 3/4" Male Pipe (Inside tapped 1/2")

01-692: 15/16" Flare x 1/2" Female Pipe

01-693: 15/16" Flare x 3/4" Female Pipe

01-699: 15/16" Flare x 3/4" Female Pipe ELBOW


LARGE DIAMETER FLEXIBLE GAS CONNECTORS



**Large Diameter Connectors
only Available
in Yellow Poly-Coated**



1"OD (3/4"ID) TUBING WITH 1" FLARE NUTS							
End Fitting Description	12"	18"	24"	36"	48"	60"	72"
3/4" MIP x 3/4" MIP	01-Y812-26	01-Y818-26	01-Y824-26	01-Y836-26	01-Y848-26	01-Y860-26	01-Y872-26
3/4" FIP x 3/4" MIP	01-Y812-28	01-Y818-28	01-Y824-28	01-Y836-28	01-Y848-28	01-Y860-28	01-Y872-28
1" FIP x 1" MIP	01-Y812-56	01-Y818-56	01-Y824-56	01-Y836-56	01-Y848-56	01-Y860-56	01-Y872-56
3/4" MIP x 3/4" FIP STRAIGHT VALVE	01-Y812-75	01-Y818-75	01-Y824-75	01-Y836-75	01-Y848-75	01-Y860-75	01-Y872-75
1" MIP x 1" FIP STRAIGHT VALVE	01-Y812-97	01-Y818-97	01-Y824-97	01-Y836-97	01-Y848-97	01-Y860-97	01-Y872-97



1 1/4"OD (1"ID) TUBING WITH 1 1/4" FLARE NUTS							
End Fitting Description	12"	18"	24"	36"	48"	60"	72"
1" FIP x 1" FIP	01-Y912-52	01-Y918-52	01-Y924-52	01-Y936-52	01-Y948-52	01-Y960-52	01-Y972-52
1" MIP x 1" MIP	01-Y912-54	01-Y918-54	01-Y924-54	01-Y936-54	01-Y948-54	01-Y960-54	01-Y972-54
1" FIP x 1" MIP	01-Y912-56	01-Y918-56	01-Y924-56	01-Y936-56	01-Y948-56	01-Y960-56	01-Y972-56
1" FIP x 1" FIP STRAIGHT VALVE	01-Y912-98	01-Y918-98	01-Y924-98	01-Y936-98	01-Y948-98	01-Y960-98	01-Y972-98
1" MIP x 1" FIP STRAIGHT VALVE	01-Y912-97	01-Y918-97	01-Y924-97	01-Y936-97	01-Y948-97	01-Y960-97	01-Y972-97


Gas Connector BTU Ratings

	12"	18"	24"	30"	36"	48"	60"	72"
3/8"OD (1/4"ID)	48,000	43,600	40,000	36,400	33,400	28,300	24,900	23,100
1/2"OD (3/8"ID)	102,000	93,100	85,000	77,100	71,100	60,500	53,200	49,100
5/8"OD (1/2"ID)	180,000	164,200	150,000	136,000	125,000	106,000	93,200	86,000
1"OD (3/4"ID)	345,000	310,000	290,900	270,500	255,900	235,000	197,400	173,900
1 1/4"OD (3/4"ID)	698,000	637,000	581,800	545,200	515,900	442,700	398,900	347,800



COMMERCIAL GAS CONNECTORS

ARROW PRESENTS

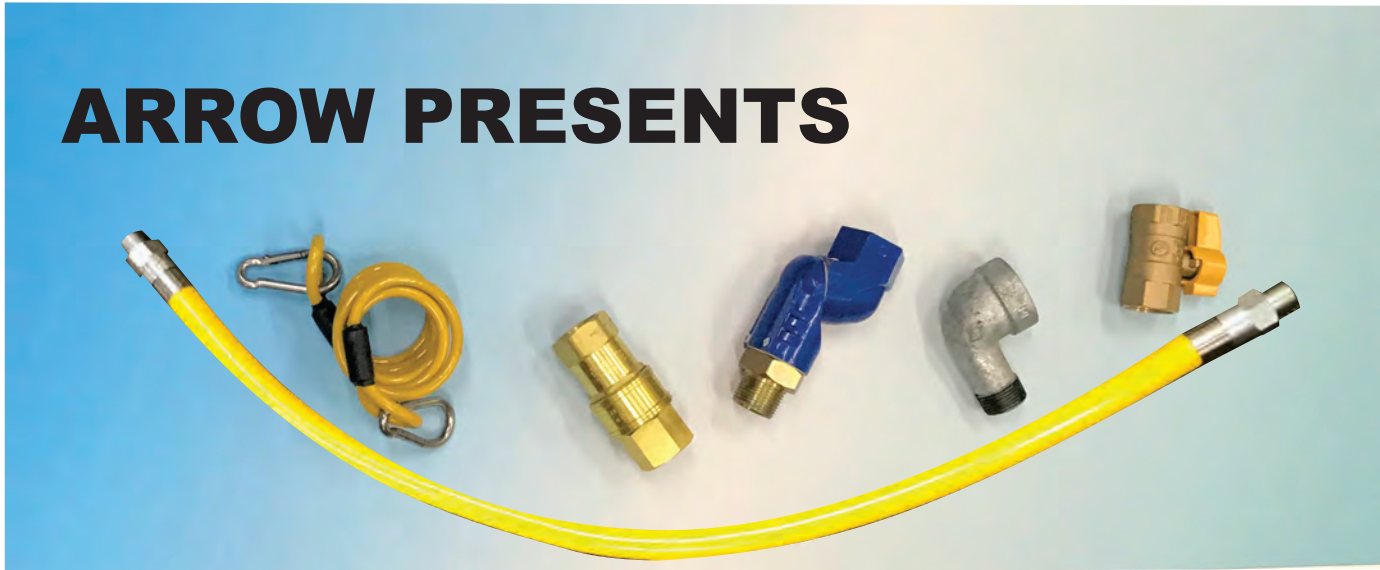

THE COMMERCIAL GAS CONNECTOR

These are 1" OD gas connectors engineered for gas appliances with high BTU requirements

DuraTrac Commercial Gas Connectors are made with a corrugated stainless steel inner core. The second layer is stainless steel wire which is tightly braided over the corrugated stainless inner core. The final layer is a thick rubberized vinyl coating containing MICROBAN (an anti-bacterial agent). This connector is designed for food service applications where frequent moving of the appliance is required for cleaning.

Individual Parts Sold Separately

	DESCRIPTION
01-2812	3/4" FIP x 3/4" FIP Straight Ball Valve
01-DQ89-12	3/4" MIP x 3/4" MIP Quick Disconnect
01-DRC-1	Restraint Cable
01-DS90-12	3/4" FIP x 3/4" MIP Swivel Elbow
42-0212	3/4" FIP x 3/4" MIP 90 degree Black Street Elbow

Commercial Gas Connector without Kit

DESCRIPTION

01-DRCY8836	1"OD Tube x 36": 3/4" MIP x 3/4" MIP with Microban coating
01-DRCY8848	1"OD Tube x 48": 3/4" MIP x 3/4" MIP with Microban coating
01-DRCY8860	1"OD Tube x 60": 3/4" MIP x 3/4" MIP with Microban coating
01-DRCY8872	1"OD Tube x 72": 3/4" MIP x 3/4" MIP with Microban coating

Commercial Gas Connector with Kit

DESCRIPTION

01-DRCY8836-QVSCE	36" Restaurant Connector Kit
01-DRCY8848-QVSCE	48" Restaurant Connector Kit
01-DRCY8860-QVSCE	60" Restaurant Connector Kit
01-DRCY8872-QVSCE	72" Restaurant Connector Kit



Division of *elbi* of America • Tel: 800-242-7769 • Fax: 800-662-7769 • www.arrowindustries.com

FLEXIBLE GAS CONNECTOR ACCESSORIES

Gas Valves

Angle Valves



	Flare	FIP
01-380G	3/8"	1/2"
01-480G	1/2"	1/2"
01-680G	15/16"	3/4"

Straight Valves



	Flare	FIP
01-387	3/8"	1/2"
01-487	1/2"	1/2"
01-488	1/2"	3/4"
01-688	15/16"	1/2"
01-687	15/16"	3/4"

FIP x FIP



	FIP	FIP
01-2806	3/8"	3/8"
01-2808	1/2"	1/2"
01-2812	3/4"	3/4"
01-2816	1"	1"

Installation



01-8738 Bubble Leak Detector, 8oz.



49-92 Teflon Tape for Gas,
1/2" x 260"

Single use pipe thread sealant and gas leak detector fluid. Available singly or in a kit containing 1 pipe thread sealant and 1 gas leak detector.



01-8SCK Seal 'N Check Kit
01-8LS Thread Sealer 8mL
01-8LD Leak Detector 8mL

Flare Adapters

to Male Pipe



	Flare	MIP
01-395	3/8"	3/8"
01-396	3/8"	1/2"
01-495	1/2"	3/8"
01-496	1/2"	1/2"
01-497	1/2"	3/4"
01-696	15/16"	1/2"
01-697	15/16"	3/4"
01-891	1"	3/4"
01-893	1"	1"
01-998	1 1/4"	1"

to Female Pipe



	Flare	FIP
01-390	3/8"	3/8"
01-392	3/8"	1/2"
01-490	1/2"	3/8"
01-492	1/2"	1/2"
01-493	1/2"	3/4"
01-692	15/16"	1/2"
01-693	15/16"	3/4"
01-890	1"	3/4"
01-892	1"	1"
01-983	1 1/4"	1"

to Female Elbow



	Flare	FIP
01-398	3/8"	1/2"
01-399	3/8"	3/8"
01-498	1/2"	1/2"
01-499	1/2"	3/8"
01-699	15/16"	3/4"

Flare Caps



05-40-6	3/8"
05-40-8	1/2"
01-698	15/16"

Male Flare to Female Flare



	Male	Female
01-800	15/16"	5/8"

QUIET-FLEX GAS CONNECTORS

Quiet-Flex

Introducing Quiet-Flex, Arrow's flexible stainless steel gas connectors for gas logs, fireplaces, gas barbeques, and other gas appliances. The Quiet-Flex is designed to help "Quiet" the whistling sound that gas flow produces in higher BTU installations.

Arrow offers the Quiet-Flex in regular stainless steel and a black-coated stainless steel. The black-coating helps hide the connector from view and can withstand temperatures up to 350 degrees.




3/8"OD Nut x Nut	10"	16"	22"	28"	34"
3/8"OD (1/4"ID) Quiet-Flex Connector with 3/8" Flare Nuts Stainless Steel	01-QS3810	01-QS3816	01-QS3822	01-QS3828	01-QS3834
3/8"OD (1/4"ID) Quiet-Flex Connector with 3/8" Flare Nuts Black Stainless Steel	01-QB3810	01-QB3816	01-QB3822	01-QB3828	01-QB3834


1/2"OD	10"	16"	22"	28"	34"
1/2"OD (3/8"ID) Quiet-Flex Connector with 1/2" Flare Nuts Stainless Steel	01-QS1210	01-QS1216	01-QS1222	01-QS1228	01-QS1234
1/2"OD (3/8"ID) Quiet-Flex Connector with 1/2" Flare Nuts Black Stainless Steel	01-QB1210	01-QB1216	01-QB1222	01-QB1228	01-QB1234

5/8"OD	10"	16"	22"	28"	34"
5/8"OD (1/2"ID) Quiet-Flex Connector with 15/16" Flare Nuts Stainless Steel	01-QS5810	01-QS5816	01-QS5822	01-QS5828	01-QS5834
5/8"OD (1/2"ID) Quiet-Flex Connector with 15/16" Flare Nuts Black Stainless Steel	01-QB5810	01-QB5816	01-QB5822	01-QB5828	01-QB5834

Black Flare Adapters

to Male Pipe	Flare	MIP
 01-396B	3/8"	1/2"
01-496B	1/2"	1/2"

Black Flare Adapters

to Female Pipe	Flare	FIP
 01-392B	3/8"	1/2"
01-492B	1/2"	1/2"



Division of *elbi* of America • Tel: 800-242-7769 • Fax: 800-662-7769 • www.arrowindustries.com

OUTDOOR GAS CONNECTORS

Outdoor Gas Appliance Supply Hoses

The hoses are designed to supply natural gas OR propane to Barbeque grills, Patio heaters, Fire pits and many other outdoor gas appliances.

Part No. 06-103219 is designed for appliances using up to 60,000 BTU/HR. It is provided with a twelve foot hose with 3/8" female flare swivel on the appliance end and a 3/8" NPT female quick disconnect on the supply end,

Part No 06-103291 is designed for appliances using up to 135,000 BTU/HR. It is provided with a twelve foot hose with 1/2" female flare swivel on the appliance end and a 1/2" NPT female quick disconnect on the supply end.



P/N	DESCRIPTION
06-103219	3/8" x 12' Gas Hose
06-103291	1/2" x 12' Gas Hose

Outdoor Gas Regulators

This Barbeque Grill Regulator is used for connecting low-pressure propane appliances such as Barbeque Grills, Patio Heaters, Fire Pits, or Crawfish Burners to a propane tank via Type 1 tank connection.



P/N	DESCRIPTION
06-QCC1	3/8" Flare
06-QCC2	1/2" Flare

Log Lighter Valves

Includes Chrome Flange & 5/16" Long Key



06-9258A 1/2" FIP Straight



06-9259A 1/2" FIP Angle



06-9000 5/16" Short Key



06-9001 5/16" Long Key x 3 3/4"
06-9002 5/16" Long Key x 2 1/4"
06-9003 1/4" Long Key x 10"
06-9004 5/16" Long Key x 10"



**THIS PAGE
IS
RESERVED
FOR FUTURE
PRODUCT
INFORMATION**



Division of *elbi* of America ▪ Tel: 800-242-7769 ▪ Fax: 800-662-7769 ▪ www.arrowindustries.com