

**NORSEKEM**  
APPLIED CONCRETE TECHNOLOGY

## PRODUCT BROCHURE



Independent British manufacturer  
of construction chemicals  
to the Precast and  
Construction  
Industries



## Why norsekem?

British manufactured

Sustainable - biodegradable range

Expert technical advice

Worldwide export

Nationwide delivery service

*WRAS* approved products

Own brand labelling

Quality controlled products

International partnerships

Technical site support

# Technology that works for you

## Who we are:

Norsekem are a UK based, leading independent manufacturer of products that assist in the production of formed concrete, the maintenance and protection of concrete mixing plant and concrete transportation vehicles, supplying the requirements of the Precast, Formwork, Construction, Readymix, and Concrete Line Pumping industries.

## PRODUCT SOLUTIONS

- CONCRETE MOULD OIL & FORMWORK RELEASE AGENTS
- APPLIED CONCRETE RETARDERS
- CONCRETE CURING SOLUTIONS
- FORMWORK TREATMENTS
- CONCRETE SEALING AND HARDENING
- CONCRETE REPAIR
- CONSTRUCTION PLANT PROTECTION
- SOLVENTS, CLEANERS AND DESCALERS
- ANCILLARIES AND SPRAYERS

## Our mission:

Our mission is to provide a complete range of products used for production of Insitu or precast concrete. Where possible to increase the safety of operatives and the preservation of the environment by offering materials and packaging that are low hazard, waterborne or based, biodegradable, recycled or from sustainable sources.

## Our support:

We listen and work closely with our customers and act on feedback. Continually looking at ways to improve both our service and our product range using the newest technology and our years of experience in the construction industry. In many cases bespoke products have been produced to meet our customers requirements.

**SUPPORTING YOUR BUSINESS WITH THE TECHNOLOGY  
RESOURCES YOU NEED**

**Technical support : 01189 899723**



# MOULD AND FORMWORK RELEASE AGENTS

## TEKEASE

### High quality chemical release agent

Drying type chemical release agent formulated to give release of formwork and a quality surface finishes to concrete. Highly refined base materials makes TEKEASE suitable for a wide range of formwork including MDO, HDO plywood forms, steel shutters and also on sealed timber forms. Spray or brush applied.

*Coverage: 25 - 60m<sup>2</sup>/ltr*

Packaging: 25ltr • 200ltr • 1000ltr

## TEKNISTRIP

### Solvent free chemical release agent

Reactive type high quality Chemical Release Agent with no solvent content. It is specially designed for release of plastic and thermoplastic mould liners in pre-cast situations providing high quality finish to concrete. This is a high viscosity product suitable for general use on most formwork materials. VOC Free. Spray applied.

*Coverage: 30m<sup>2</sup>/ltr*

Packaging: 25ltr • 205ltr • 1000ltr

## PLYEASE

### General purpose chemical release agent

Tried and trusted cost effective formulation of hydrocarbon carrier and chemically active ingredient producing a low viscosity concrete mould release agent suitable for use on shuttering ply, MDO timber and steel. Achieves a clean "strike" on release. Spray or brush applied.

*Coverage: 25 - 60m<sup>2</sup>/ltr*

Packaging: 25ltr • 200ltr • 1000ltr

## TEKNICON

### High quality reactive type chemical release agent

Suitable for general use on most formwork materials. Particularly recommended on proprietary MDO & HDO plywood forms. Also suitable for use on steel shutters and column boxes and sealed timber forms. Low odour, suitable for enclosed environments. Spray applied.

*Coverage: 25 - 60m<sup>2</sup>/ltr*

Packaging: 25ltr • 205ltr • 1000ltr

BRITISH MANUFACTURED



## TEKNICON SN

### Quick drying high quality chemical release agent

Suitable for use on all types of formwork including MDO, HDO, Phenolic panels, steel formwork and column formers. Quick drying formulation. Greatly reduces the occurrence of blowholes, surface blemishes and staining. Spray applied.

*Coverage: 25 - 60m<sup>2</sup>/ltr*

Packaging: 25ltr • 200ltr • 1000ltr

## THORCAST CRB

### Dry cast release

A specially blended low viscosity mould oil, formulated to give quick, positive release for semi dry concrete casting systems. It is odourless, and low staining. Allows rapid production in automated production facilities, and provides excellent results on unvented steel moulds.

*Coverage: Trials required*

Packaging: 25ltr • 200ltr • 1000ltr

## ECODIN WB

### VOC free water borne release agent

Water borne Concrete Release Agent based on modern rapeseed ester emulsion technology. It is completely free from hydrocarbon solvents and is VOC free. Ideal for use in pre-cast factories or confined areas. Spray applied.

Coverage: 25 - 60m<sup>2</sup>/ltr

Packaging: 25ltr • 205ltr • 1000ltr

## ECODIN RS

### High quality chemical release agent

Vegetable oil based, ecologically sustainable release agent formulated using modern VERA technology. Designed with operator health and safety in mind, and with no unpleasant odour. Provides a quality surface finish to concrete with reduced blow holes.

Coverage: 25 - 60m<sup>2</sup>/ltr

Packaging: 25ltr • 205ltr • 1000ltr

## TEKNICAST

### Sprayable liquid release wax

A chemically neutral sprayable liquid release wax. Recommended for architectural concrete production in pre-cast factories, as well as difficult release situations on site. Suitable for use on GRP, Plastic, Phenolic boards, steel shutters, column boxes and sealed timber forms. Spray applied.

Coverage: 30m<sup>2</sup>/ltr

Packaging: 25ltr • 205ltr • 1000ltr

## TEKNICAST ULTRA

### Sprayable UV detectable liquid release wax

Chemically neutral sprayable liquid release wax with the inclusion of a UV dye that allows simple verification of application and coverage with a std UV light. Recommended for architectural concrete production in precast factories, as well as difficult release situations on site. Suitable for use on GRP, Plastic, phenolic boards.

Coverage: 30m<sup>2</sup>/ltr

Packaging: 25ltr • 205ltr • 1000ltr

## THORCAST

### General use high quality mould oil

General purpose formulated mould oil with additives and a degree of active release ingredient which can be used on a wide range of metal, timber and other formwork materials and coatings. Formulated to give optimum release and quality of finish to concrete over a wide range of mix designs. Spray or brush applied.

Coverage: 15 - 45m<sup>2</sup>/ltr

Packaging: 25ltr • 200ltr • 1000ltr

## THORCAST 533

### Premium grade general purpose chemical release agent

Tried and trusted premium grade formulation mould oil with "extra" additives and a degree of active release ingredient which can be used on a wide range of metal, timber and other formwork materials and coatings. Formulated to give optimum release and quality of finish to concrete over a wide range of mix designs. Spray or brush applied.

Coverage: 15 - 45m<sup>2</sup>/ltr

Packaging: 25ltr • 205ltr • 100ltr

# MOULD AND FORMWORK RELEASE AGENTS

SUSTAINABLE - BIODEGRADABLE



# APPLIED CONCRETE RETARDERS

# CONCRETE CURING SOLUTIONS

## EXPERT TECHNICAL ADVICE



### BRUSHTARD

#### "Gel" type brush applied retarder

Gel type retarder, dyed green, which can be brushed applied to formwork / mould surfaces to provide a uniform coating of retardant. Brushtard is suitable for producing exposed aggregate finishes for keying construction joints at stop-ends, or for subsequent plastering or coating operations.

*Coverage: 3 - 4m<sup>2</sup>/kg*

Packaging: 25kg

### SPRAYTARD

#### Water based top face retarder

A blue aqueous liquid designed to be spray applied on the top face of horizontal cast concrete, immediately after finishing. Produces an exposed aggregate finish suitable for keying construction joints or to enable excellent bonding of subsequent coatings or toppings.

*Coverage: 3 - 5m<sup>2</sup>/ltr*

Packaging: 25ltr • 200ltr

### TUFFACURE S

#### Water based, sodium silicate based curing membrane

An aqueous solution of sodium silicates which when applied to freshly placed concrete penetrates and forms a microscopic crystalline structure in the concrete pores of the surface layer. This acts in reducing the loss of moisture by evaporation from the concrete. Tuffacure S becomes an integral part of the concrete surface. Spray applied

*Coverage: 5.5 - 6m<sup>2</sup>/ltr*

Packaging: 25ltr • 205ltr • 1000ltr

### TUFFACURE R90/R90AL

#### 90% efficient curing membrane / Aluminized

Resin based 90% efficient curing membrane used to protect freshly placed or formwork cast concrete from excessive water loss during the critical curing period. Complies with the requirements of ASTM C309-91 Type 1 Class B. An Aluminized version for PQ or runway concreting is available for protection against sun.

*Coverage: 5.5 - 6m<sup>2</sup>/ltr*

Packaging: 25ltr • 205ltr • 1000ltr

### TUFFACURE WB

#### 90% Non hazardous emulsion of micro-crystalline waxes

Non hazardous water-emulsion based on micro-crystalline waxes providing a curing membrane used to protect newly poured concrete surfaces in the critical early stages of hydration from the effects of too rapid evaporation of surface moisture. Will not degrade over time by weathering. Conforms to specification type: ASTM C309 Type 1 Class

*Coverage: 4 - 5.5m<sup>2</sup>/ltr*

Packaging: 25ltr • 200ltr • 1000ltr

### TUFFACURE P

#### Water based polymer curing membrane

Specially formulated, water based curing compound utilizing advanced acrylic copolymers which become part of the integral concrete surface. Non-degrading, enabling it to also be used as a surface treatment for new and existing concrete to seal, harden and protect from staining, frost damage and efflorescence.

*Coverage: 4 - 7m<sup>2</sup>/ltr*

Packaging: 25ltr • 200ltr • 1000ltr

## SHUTTAWAX

### Shutter sealing wax

Specifically developed for the initial sealing of various formwork surfaces to standardize absorption and prolong useable form life. Based on crystalline waxes and with a fugitive dye, this thixotropic material when worked into a surface takes on a smooth, thin, paste consistency. It is not in itself a release agent, but will work on the basis of a physical barrier release.

Coverage: 10m<sup>2</sup>/ltr

Packaging: 20kg

## EDGESEAL PU 1K

### PU sealer for cut edges of formwork ply sheets

Dyed blue, penetrative, moisture cure PU 1K sealer is specifically developed for the concrete industry to seal cut and exposed edges on all types of formwork ply or to treat any holes cut for tie rods etc. The blue colour provides easy visual verification that the edges have been treated.

Coverage: 6-10m<sup>2</sup>/ltr

Packaging: 5ltr

## SHUTTAFILL - Phenolic grade

### Shutter repair compound

Two part polyester based filler consisting of a dark brown coloured paste and reactive hardener specially developed to repair damage on Formwork Panels and shuttering. It is most suitable for use on Phenolic Coated Ply Forms, as the final colour is very sympathetic to most Phenolic boards allowing near "invisible" repairs to be carried out.

Packaging: 6 x 1.5kg units / box  
2 x 7kg units / box

## FORMSEAL PU1K

### PU formwork sealer

Specifically developed to seal formwork ply and special timber features. It is principally used to extend the life of formwork panels or wood features and to standardise absorbency in the timber. It can also be applied to damp timber.

Coverage: 4-5m<sup>2</sup>/coat/ltr

Packaging: 5ltr

## METALGUARD RPS

### Storage coating for metal

Thixotropic film forming and dewatering protective coating for metal components and all types of steel formwork which can be applied by dipping, spray or brush. The dewatering characteristics make it ideal for the storage of large steel moulds, etc, for long term protection, two years approx., Ideal for treating metal components for storage or shipment.

Coverage: 20 - 25m<sup>2</sup>/ltr

Packaging: 25ltr • 205ltr • 1000ltr

# FORMWORK TREATMENTS

## WORLDWIDE EXPORT



# CONCRETE SEALING, HARDENING AND DUSTPROOFING

## TUFFASEAL 284

### High quality water based sealer and water repellent

Ready to use water based fluorochemical sealer suitable for stone, concrete, brick and wood. Ideal for the home, institutional, industrial and catering applications. Protects surfaces from staining from food, olive oils, red wine, ink, coffee and motor oil.

*Coverage: 1 - 10m<sup>2</sup>/ltr depending on porosity of surface*

Packaging: 4 x 5ltr • 25ltr • 205ltr

## TUFFASEAL HDS

### Concentrated clear surface sealer

Concentrated clear material based on an aqueous solution of sodium silicate and surface active chemicals which when applied to new or old concrete will react with calcium compounds chemically sealing the pores of the matrix, providing a dense, sealed surface with greatly increased resistance to abrasion and chemical attack.

*Coverage: 5 - 8m<sup>2</sup>/ltr*

Packaging: 25ltr • 205ltr

## TUFFASEAL AR403

### Clear acrylic resin polymer sealer & curing membrane

Solvent borne, clear, acrylic resin polymer treatment designed to cure freshly placed concrete, and provide long term benefits of sealing, hardening and dustproofing the surface. Can also be applied to existing concrete surfaces to seal, harden and dustproof. Compatible with dry shake systems. Conforms to the requirements of ASTM C-309 Curing liquids Type 1 Class B and ASTM C156-95.

*Coverage: 5m<sup>2</sup>/ltr*

Packaging: 25ltr • 205ltr

## TUFFASEAL BLOC

### Acrylic "one coat" sealer

24% high solids acrylic solvent based coating for both porous and non-porous surfaces such as concrete, blockwork and brickwork. Only 1 coat required. After evaporation leaves a tough weather proof, clear coating which resists a variety of stains from oil to paint. making it ideal as a protective coating for driveways, paths and walls.

*Coverage: 5m<sup>2</sup>/ltr*

Packaging: 25ltr • 205ltr

NATIONWIDE DELIVERY





# CONCRETE REPAIR

## TIEPLUG - Class R4

### Tiehole and lifting eye filler

Polymer modified, fibre reinforced, rapid set repair cement for the filling of tie-holes formed by formwork bolts and through ties in new construction. Particularly suited where a rapid setting, durable, waterproof mortar is required. Can also be used for sealing grout holes and voids around fixings in pre-cast elements and any small structural grade repairs. Complies with Clause 6 of the DTp Standard BD 27/86 . WRAS approved.

*Yield: 4.1ltr*

Packaging: 8kg plastic tub



## FASTPLUG - Class R4

### Fibre reinforced general purpose repair mortar

Structural grade, fibre reinforced repair mortar which is shrinkage compensated, waterproof and slump free, with exceptional compressive and adhesion strengths. This product has many and varied applications with or without the addition of aggregate. Build heights up to 300mm in pockets.

Complies with Clause 6 of the DTp Standard BD 27/86. WRAS approved.

*Yield: 13.3ltr- 23ltr when bulked*

Packaging: 25kg plastic tub



## MATCHPATCH - Grey or white

### Large section, colour blending repair mortar - grey or white

Pre-packaged, polymer modified repair cement for rapid structural repairs to in-situ and pre-cast concrete. Suitable for large section repairs to damaged and honeycombed concrete in new build construction as no primer is required. It is especially suitable for repairs which need to be colour matched to existing concrete to provide a high quality aesthetic finish. Can be used vertically and overhead. Complies with Clause 6 of the DTp Standard BD 27/86

*Yield: 12.5ltr - Coverage: 1.25m<sup>2</sup> @ 10mm*

Packaging: 25kg plastic tub

## FASTPATCH - Grey or white

### Structural grade, colour matching repair mortar - grey or white

Pre-packaged, polymer modified repair cement for rapid structural repairs to in-situ and pre-cast concrete. It is especially suitable for repairs which need to be colour matched to existing concrete, provides a high quality aesthetic finish. It is also suitable for repairs to damaged, honeycombed or "boney" concrete in new build construction as no primer is required. Complies with Clause 6 of the DTp Standard BD 27/86

*Yield: 12.5ltr - Coverage: 1.25m<sup>2</sup> @ 10mm*

Packaging: 25kg plastic tubs

## FILL 'n' RUB - Grey or White

### Fine blowhole - colour matching filler

Fine grade polymer modified cement provides a convenient method of filling blowholes and small surface defects in precast or insitu cast concretes, as well as providing an even standardised colour and aesthetic finish. Available in Grey and White versions to enable colour matching with the existing concrete. Best described as "engineering polyfilla" and ideal for bag rubbing techniques. Complies with Clause 6 of the DTp Standard BD 27/86

*Yield: 14ltr /grey - 15.9ltr /white*


Packaging: 25kg plastic tub

WRAS APPROVED



# CLEANERS, SOLVENTS AND DESCALERS

## OWN BRAND LABELING

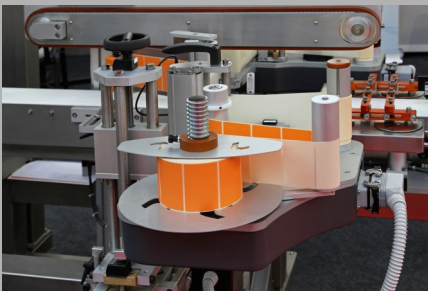

### **POLY-DISSOLVE**

#### **Polystyrene dissolver**

Specially formulated to dissolve and emulsify expanded polystyrene commonly used in the Concrete Construction and Pre-Cast Industries. These include void formers, stop ends, box outs and inserts. Has the ability to dissolve up to 10 times its own volume, this depends on polystyrene density and application technique.

Packaging: 20ltr • 205ltr

### **SOLVKLEEN**

#### **Solvent based cleaning solution**

High quality formulation blend of specially selected solvents and reactive ingredients designed for cleaning sprayers, tools and equipment after they have been used with resin based products and bituminous coatings. Ideal for all general cleaning or degreasing requirements.

Packaging: 20ltr • 205ltr

### **BRICK-AID**

#### **Biodegradable brick cleaner**

20.5% Hydrochloric Acid solution, containing inhibiting filming and surfactant lifting additives. It is biodegradable, effective, fast acting purpose formulated chemical descaler and cleaner for washing down new brickwork and concrete surfaces.

Packaging: 4 x 5ltr • 25ltr • 200ltr

### **ALFANOL HD**

#### **Heavy duty, biodegradable cleaner and traffic film remover**

Developed for the Scandinavian market this is a water based, biodegradable, Non-caustic Heavy Duty Cleaner suitable as a Traffic Film Remover, Degreaser, hard surface cleaner and diesel spill detergent. Ideal for areas around diesel, gas and other oil dispensing equipment as well as contractors plant. Particularly suited to the removal of grease and oil stains from hard surfaces such as concrete, garage floors, drive ways, paving blocks etc. Can be used on asphalt in a diluted form to remove oil deposits and for cleaning lorries and other vehicles.

Packaging: 25ltr • 205ltr

### **POLY-DISSOLVE SAFE**

#### **Safe, low hazard polystyrene dissolver**

Pleasant citric smelling, less hazardous product than our standard polystyrene dissolver. Poly-dissolve safe has been specially formulated to safely dissolve and emulsify expanded polystyrene commonly used in the Concrete Construction and Pre-Cast Industries. Much less harmful to operatives and the environment. Has the ability to dissolve up to 10 times its own volume, this depends on polystyrene density and application technique.

Packaging: 5ltr • 25ltr • 205ltr

### **FORMKLEEN**

#### **Biodegradable formwork and hard surface cleaner**

Developed for the Scandinavian market as a biodegradable, low hazard, hard surface cleaner for removing cement films and deposits from the pallet rings in Pre-cast Spun Pipe factories. The dual action product is a unique blend of surface active ingredients, sequestrates and organic scale removers specifically designed to cut through and remove the mould oil and allow the organic descalers to work on the cement deposits. Suitable for all hard surfaces.

Packaging: 25ltr • 200ltr

### **XYLENE-KLEEN**

#### **Tool and equipment cleaner**

Developed for the cleaning of resins from tools and site equipment.

Packaging: 1ltr • 5ltr • 25ltr

### **CONREM**

#### **Heavy duty biodegradable brick and concrete cleaner**

28% Hydrochloric Acid, containing inhibiting filming and surfactant lifting additives. A biodegradable brick and concrete cleaner for removal of cement, lime and mortar deposits, efflorescence, moss, algae and many other stains from brick and concrete finishes. Also suitable for cleaning concrete and cement from tools, mixing equipment and for the removal of residues from accidental spillage's of stronger cement and concrete mixes etc.

Packaging: 25ltr • 205ltr

## PLANTGUARD CPS

### Protective plant coating

Thixotropic film forming and dewatering coating which can be applied by dipping, spray or brush to help prevent concrete adhesion on concrete skips, road forms, manhole shutters, screed mixers & pumps, forced action pan mixers, concrete pumps, concrete mixers. The coating prevents concrete sticking to the metal and easier to remove using a hot pressure washer, speeding up cleaning time.

*Coverage: Refer to technical support*

Packaging: 25ltr

## TEKNIGUARD II

### Semi-dry protection layer

Formulated to produce a semi-dry oil that sticks and acts as a protective layer to stop concrete adhering to all sorts of Concrete Mixing and Placing Equipment, including Pan Mixers, Concrete Pumps, Concrete Lorries, Brick Tables. This makes removal of concrete that much easier by high pressure water techniques or simply tapping the metal and it falls away.

*Coverage: Refer to technical support*

Packaging: 25ltr • 205ltr

## BAR-FAST EASF

### Epoxy anchoring resin

High performance two-part chemical anchor resin based on unsaturated epoxy acrylic resin in vinyl-toluene monomer. Styrene free and low odour. Suitable for direct fixing into concrete, stone and brickwork. Suitable for starter bars, studs, bolts and other metals.

Stress free fixing system.

Packaging: 12no. 410ml cartridges / box

## TEKNIGUARD

### Solvent free plant protection coating

Special blend of oils and active ingredients that forms a protective layer to help stop concrete adhering to all sorts of Concrete Mixing and Placing Equipment, including Pan Mixers, Concrete Pumps, Concrete Lorries. This makes removal of the concrete that much easier by high pressure water techniques.

*Coverage: Refer to technical support*

Packaging: 25ltr • 205ltr

## POLY-BAR PLUS

### Polyester anchoring resin

High performance, fast curing two-part chemical anchoring system based on unsaturated polyester resin in styrene. Chemical resistant, waterproof when cured and vibration proof. Suitable for use in concrete, brick and stone for fixing wall ties, starter bars, studs and bolts.

Stress free fixing system.

Packaging: 12no. 410ml cartridges / box

# PLANT PROTECTION

# RESIN ANCHORING


QUALITY CONTROLLED



# PLANT PROTECTION

LeycoChem **LEYDE**

- Protects mixers and equipment from the adhesion of Concrete
- Cuts cleaning time dramatically lower labour costs
- Longer service life of the machinery due to better care
- Contains no dangerous solvents or heavy metals

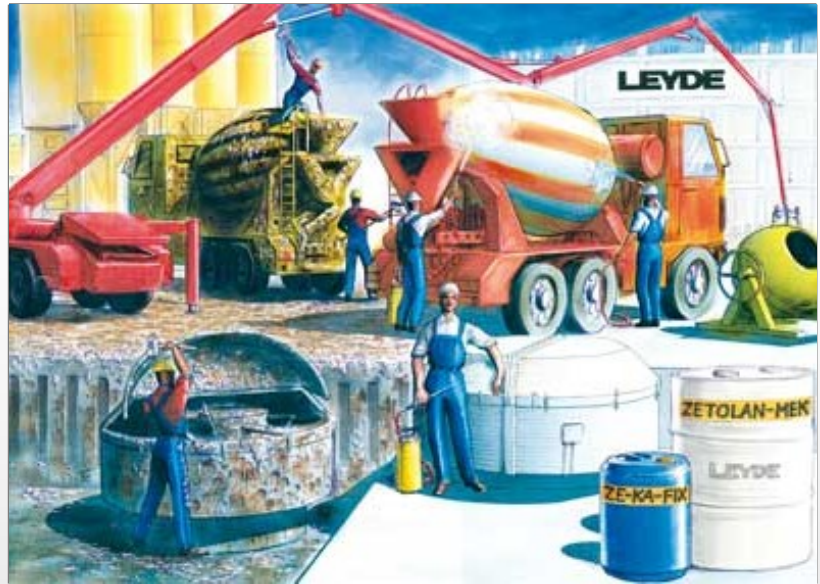

## ZETOLAN MEK 2

### Biodegradable anti-adherent

Superior release and anti-adherent which has an additive that physically breaks down hardened concrete over time. It effectively keeps areas clean which are exposed to concrete, allowing easy removal by power washing at shift end. Biodegradable and kind to rubber components and low hazard to operatives. Zetolan MEK 2 is ideally suited for all types of concrete mixers, pumps, chutes, buckets.

Packaging: 25ltr • 210ltr • 1000ltr

## ZETOLAN MEK 3

### Biodegradable anti-adherent

Superior release and anti-adhesion properties and an increased amount of additive over MEK 2. Ideal if your mixer is badly caked up with hardened concrete once starting a cleaning regime. Proven to be biodegradable and kind to rubber components and low hazard to operatives. Zetolan MEK 3 is ideally suited for all types of concrete mixers, pumps, chutes, buckets.

Packaging: 25ltr • 210ltr • 1000ltr

## INTERNATIONAL PARTNERSHIPS



## ZETOLAN MEK PLUS 2

### Biodegradable cement truck and anti-adherent

Developed for use on truck mixers to provide a drying protection film so that dust build up was less of a problem. It still has the superior release and anti-adhesion properties and the additive ingredient that physically breaks down hardened concrete over time. Proven to be biodegradable and kind to rubber components and low hazard to operatives. By applying a light coating to a wet or dry surface exposed to concrete, will prevent adhesion for up to 24 hours.

Packaging: 25ltr • 210ltr • 1000ltr

## ZETOLAN MEK PLUS 3

### Concrete pump and mixer protector

Developed so as not to entrain air into the concrete mix but still give superior release and anti-adhesion properties and still includes the additive that physically breaks down hardened concrete over time. Proven to be biodegradable and kind to rubber components and low hazard to operatives. A light coating applied to a wet or dry surface exposed to concrete will prevent adhesion for up to 24 hours. Suitable for all types of concrete mixers, pumps, chutes.

Packaging: 25ltr • 210ltr • 1000ltr

## **ZE-KA-FIX**

### **High concentrate Phosphoric acid cleaner**

Highly concentrated, well proven cleaning agent for all machinery associated with the concrete and cement industries. It is chloride-free and can be recycled around the concrete plant without any adverse effect to the following batch of concrete. It is also biodegradable, much less corrosive to metal than hydrochloric acids, it actually protects exposed ferrous metals, and is much less hazardous to operatives. Economical in use due to high dilution rates.

Packaging: 25kg • 285kg

## **ZE-KA-FIX RTU**

### **Ready to use Phosphoric acid cleaner**

Ready to use version of ZE-KA-FIX, the proven cleaning agent for all machinery associated with the concrete and cement industries. It is also biodegradable, much less corrosive to metal than hydrochloric acids, it actually protects exposed ferrous metals, and is much less hazardous to operatives. chloride-free

Packaging: 25ltr • 205ltr • 1000ltr

## **CLEANING BRUSHES**

**LEYCO B25** - Brush Head 25cm

**LEYCO BiLevel** - Bilevel brush head

**LEYCO B 25+** - Brush with handle 25cm

**LEYCO B50+** - Brush with handle 50cm

**LEYCO B50+** "blue"- Scratching brush 50cm

**LEYCO VBS** - Brush link

**LEYCO TELESCOPE** - Telescope extension

## **APPLICATION SPRAYERS**

### **MV7 ELECTRICAL "airless" SPRAYING PUMP**

Airless effective sprayer technology to minimise consumption application of products

### **RR1 AIR DRIVEN SPRAYING SYSTEM**

Effective sprayer technology to minimise consumption application of products

## **LEYCO-SLICK**

### **Concrete Pump priming aid**

LEYCO-SLICK is a powder packed in water-soluble, ready-to-use, pre-weighed pouches. It is a unique compound of high performance components, which offers superlative cost reductions by saving time and protecting pumps and pipes. Leyco Slick eases concrete pressure in the pump and pipes and optimises pump capacity when using "sticky" concrete mixes.

LEYCO-SLICK is environmentally friendly, contains nothing harmful to concrete, like alkalis, chlorides or active air entraining substances, and is compatible with all accepted products in the construction and concrete industries

Packaging: 80 x 230grms sachets / bucket

# PLANT CLEANING

*LeycoChem* **LEYDE**

SOLE UK DISTRIBUTOR

# PUMP PRIMING



# APPLICATION SPRAYERS

## MESTO FERROX PLUS 3585P

10ltr working capacity metal, heavy duty construction sprayer fitted with Viton seals that allows use with products that have hydrocarbons in them, such as Mould oils, Chemical Release agents, and curing agents. They feature a fantastic specification with some new ideas to make user life easier, such as the integrated funnel cover to stop dirt ingress and sight glass for easy verification of fill level.

### *SPECIFICATION*

Steel tank, polyester coated 13ltr total - 10ltr working, 6 bar

- integrated spare parts compartment
- spiral hose 2,5 m with safety interlock
- spray and extension wand holder
- pump holder
- sight glass for fill lecontrol
- large filling funnel
- backpack type sprayer
- ergonomic pump handle
- flat spray nozzle with fine filter
- FPM (Viton) gaskets, oil-resistant

## MESTO FIX PLUS 3237FP

5ltr working capacity plastic construction sprayer fitted with Viton seals that allows use with products that have hydrocarbons in them, such as Mould oils, Chemical Release Agents, Curing Agents, as well as retarders. They feature a good specification at a price that makes them real value for money.

### *SPECIFICATION*

Plastic tank with large pressure reservoir, 3 bar

- Total content 7.0 l
- Filling content 5.0 l
- Carried at the side, carrying straps
- Hose 2.0 m, oil proof, transparent
- FPM (Viton) seals, oil resistant
- Special flat spray nozzle, plastic

APPLIED WITH QUALITY



## MESTO PROFI PLUS 3270P

10ltr working capacity plastic heavy duty construction sprayer fitted with Viton seals that allows use with products that have hydrocarbons in them, such as Mould oils, Chemical Release agents, and curing agents.

### *SPECIFICATION*

Plastic tank with large pressure reservoir, 3 bar

- Total content 12.5ltr
- Working capacity 10.0ltr
- carried at the side
- seals: FPM ("Viton")
- brass 110° flat fan nozzle 8001 fitted as std.
- brass spray wand 50 cm, 360° rotatable
- spiral hose 2,5 m with integrated dirt filter



# SUPPORT PRODUCTS

## MV7 ELECTRICAL "airless" SPRAYING PUMP

Effective sprayer technology to minimise consumption application products

## RR1 AIR DRIVEN SPRAYING SYSTEM

Effective sprayer technology to minimise consumption application products

## METAL ROTARY BARREL PUMP

Suitable for

lubricating oils, fuel oils, paraffin, and anti-freeze. Delivers approx. 20ltrs per 72 revolutions.  
Not suitable for water or corrosive products.

## PLASTIC ROTARY BARREL PUMP

Acid resistant

Rotary pump is suitable for all types of chemicals including acids, mould oils and diesel.  
Dispenses 250cc per revolution / 2.7ltrs per minute.

## PLASTIC STROKE PUMP

Plastic Stroke Pump suitable for all products. It dispenses approx. 250ml per vertical stroke.  
Complete with adaptors.

## DRUM TAPS

3/4" BSP & 2"

BSP high flow taps in polyethylene are suitable for use with most acids and alkalines. 2" model is capable of emptying a 205ltr drum in 3 minutes

## THREADED ADAPTORS

3/4" Adaptors are available to suit different types of barrels:-

*Mauser* Thread adaptor (Blue) for 2" Flow King Tap or pumps

*Reike Trisure* Drum Tap Adaptor (Orange) for 2" Flow King Tap or pumps

*Trisure* Drum Closure Plastic 2"-3/4" (White) allows the fitment of 3/4" taps

## SUMP PALLETS

Plastic sump pallets suitable for 1, 2 or 4 drums.

## DRUM STAND

Metal drum

stand suitable for use with 200ltr, 205ltr, 210ltr & 220ltr metal and plastic drums.

## APPLICATION GUNS

Standard duty cartridge gun - suitable for 300ml, 310ml, 380ml, 400ml cartridges

Heavy duty ProPlus cartridge gun - suitable for 300ml, 310ml, 380ml, 400ml cartridges

Standard duty resin application gun - suitable for 380ml/400ml resin anchor cartridges

Heavy duty resin application gun - suitable for 380ml/400ml resin anchor cartridges

## SEALANTS / FOAM

Clear silicone sealant for formwork - 310ml cartridge

Brown silicone sealant for formwork - 600ml sausage

PU expanding foam - 750ml canister

SITE SUPPORT



## PRODUCT SOLUTIONS

- CONCRETE MOULD RELEASE OILS
- FORMWORK RELEASE AGENTS
- FORMWORK TREATMENTS
- CONCRETE REPAIR
- SOLVENTS, CLEANERS AND DESCALERS
- CONCRETE CURING SOLUTIONS
- APPLIED CONCRETE RETARDERS
- CONCRETE SEALING AND HARDENING
- CONSTRUCTION PLANT PROTECTION
- ANCILLARIES AND SPRAYERS

Norsekem Limited  
Unit 6c, Stokes Farm  
Binfield Road  
Wokingham  
Berkshire  
RG40 5PR

Tel: 01189 899723

Fax: 0845 4027662

Email: [sales@norsekem.co.uk](mailto:sales@norsekem.co.uk)

Technical support : 01189 899723

[norsekem.co.uk](http://norsekem.co.uk)