

Chassis Monitor




10.1" (16:9) Specifications

**RoHS
COMPLIANT
2002/95/EC**

Model Name	W10L100-CHH1/W10L110-CHH1
Viewable Size Image	10.1"(16:9)
Active Display Area(mm)	220.416 (H) x 129.15 (V)
Display Resolution (pixel)	1024(H)x600(V)
Pixel Pitch(mm)	0.21525 (H) x 0.21525 (V)
Synchronization Range_ Horizontal / Vertical	31.5~46.9KHz / 60~75Hz
Recommended Resolution	1024x600@60Hz
Contrast Ratio	500:1 (typ.)
Brightness(cd/m ²)	250 (typ.)
Viewing Angle(CR>=10)	-70,70 (H); -60,50 (V)
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	10 W typical, normal operation
Power Management	VESA DPMS Compliant
Optional Video Input	S-Video, Composite
Plug & Play	Yes
Support Video Signal Type	NTSC/PAL
Optional DVI Input	No
Optional Touch Screen	4 Wire Resistive

Mechanical Drawing

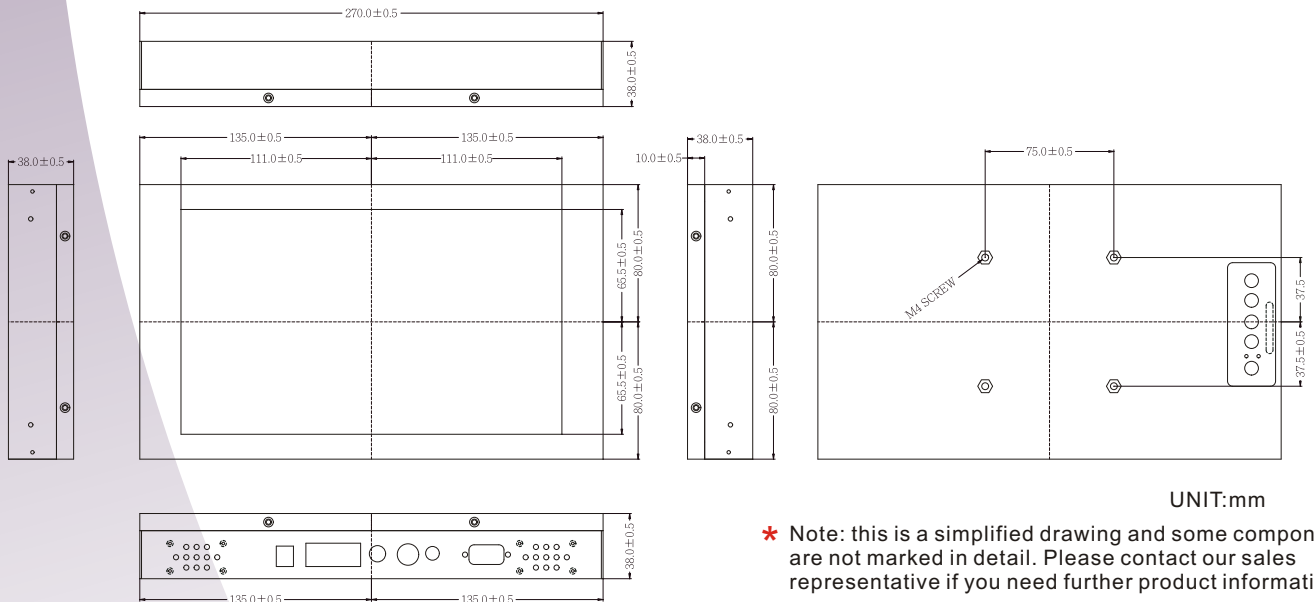

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First release	Jul-21-09
1.1	Pic change	Jul-06-10
1.2	Spec change	Nov.14.12