


SEAM PHANTOM®

INSTRUCTION MANUAL – CENTER WATER FEED ELECTRIC EDITION

Model No. 0010-1 Special Edition

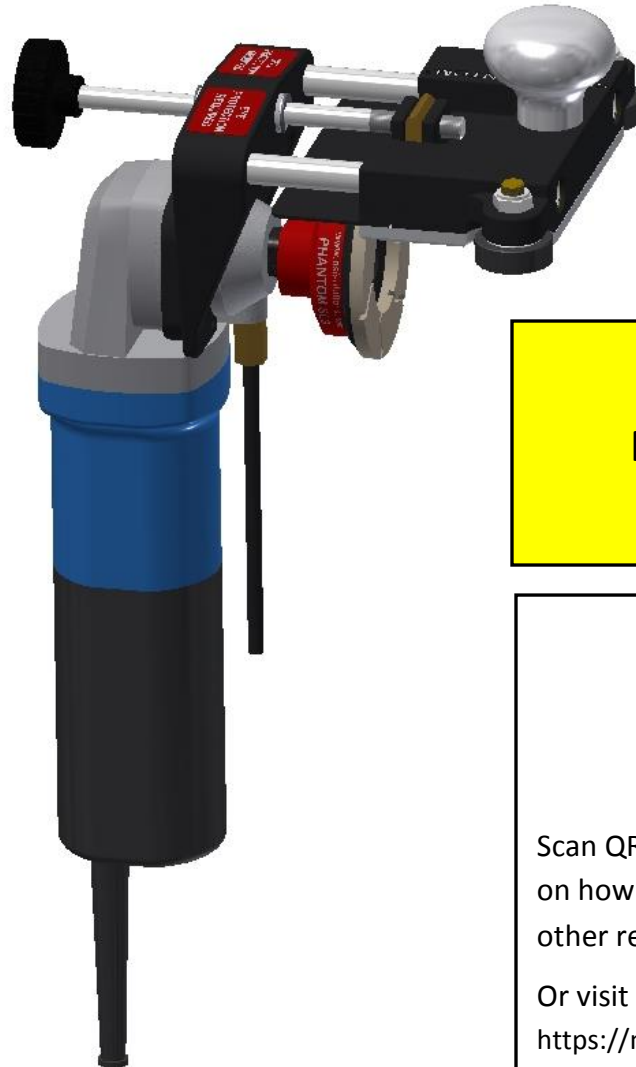

****Special Edition****

**Fits Makita PW5001C
polisher**



Scan QR Code to visit NSI Solutions for videos on how to operate your Seam Phantom® and other resources.

Or visit

<https://nsisolutions.com/seam-phantom-sub-page/>



Please read this instruction manual thoroughly to ensure safety and correct use of tool.
Keep this manual in a place where operators can access it easily, anytime necessary.

PATENT Number: US 8,162,726

MADE IN USA

INTRODUCTION

Thank you for purchasing the NSI Solutions SEAM PHANTOM®. Please read this instruction manual thoroughly for assembly instructions, safe operation, tool handling, tool capabilities information, and all other precautions before using the tool. Keep this manual in a place where operators can access it easily.

To be used this SEAM PHANTOM® is assembled to an electric polisher. Observe all Operational and Safety instructions contained in the Instruction Manual supplied with the polisher.

TABLE OF CONTENTS

- INTRODUCTION 2
- GENERAL SAFETY RULES..... 3
- ASSEMBLY 3
 - SEAM PHANTOM® Package and Accessories 3
 - Tools Needed for Assembly 3
 - Assembly Instructions 4
 - Adjusting the Seam Phantom® 6
- USE INSTRUCTIONS 7
 - Before Using the Seam Phantom® - Preparations 7
 - How to Operate 8
- CLEANING AND MAINTENANCE 11
- CONTACT NSI SOLUTIONS 13

GENERAL SAFETY RULES



WARNING: Read and understand all instructions. Failure to follow all instructions listed below may result in electric shock, fire and/or serious personal injury. Additionally, observe all safety instructions provided with the electric polisher.

ASSEMBLY

SEAM PHANTOM® Package and Accessories

Seam Phantom® Special Edition (for Makita PW5001C Center Water Feed, Electric Polisher)	Included in Package
(1) Seam Phantom® Special Edition	•
(1) Adapter/Spacer for Makita PW5001C Electric Polisher	•
(4) Screws Required for Assembly	•
(4) Washers (to allow for angle adjustment of the grinding head)	•
(1) 48" Glide Guide Rail	•
72" Glide Guide Rail	Optional
96" Glide Guide Rail	Optional
(1) Tool Box for Seam Phantom® and Attachments	•
(1) SL3®-ADM14 - M14 Threaded Snail Lock Adapter	•
(1) SL3®-60 - 60 Grit Turbo Abrasive	•
(1) SL3®-150 - 150 Grit Turbo Abrasive	•
(1) SL3®-300 - 300 Grit Turbo Abrasive	•
(1) SL3®-Cup 2 – 2" Cup Wheel for back grinding	•
(2) C-Clamps for clamping Glide Guide	•
(2) Gauge Blocks	•
(1) Assembly and Usage Instruction Manual	•
(1) Makita PW5001C Electric Polisher	Supplied by Customer

KEY



NOTE

These items supplied with the package as noted.

Optional These items optional – available for purchase separately.

Tools Needed for Assembly

- 3 mm Allen (Hex) Wrench
- Crescent Wrench (1 1/8" capacity)

Assembly Instructions


CAUTION: Always be sure that the tool is switched off and unplugged before carrying out any work on the tool.

1. If installed, remove rubber wheel guard (item 1) from polisher (See Figure 1 below). Guard will not be needed with the Seam Phantom®.
2. Using a 3mm Allen or Hex wrench, remove quantity (4) 4mm diameter Hex screws (item 2) from head of Polisher at the locations shown in Figure 2 below. Do not remove the polisher head. Save screws to reassemble the polisher if it is removed from the Seam Phantom® in the future.



Item 1 – Wheel Guard

FIGURE 1 - Wheel Guard Removal

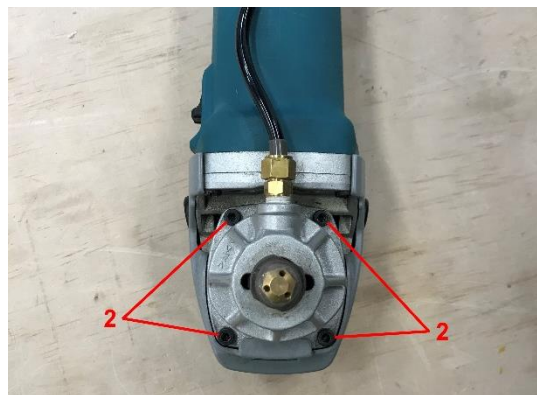

Item 2 – 4mm Screws

FIGURE 2 – Screw Removal

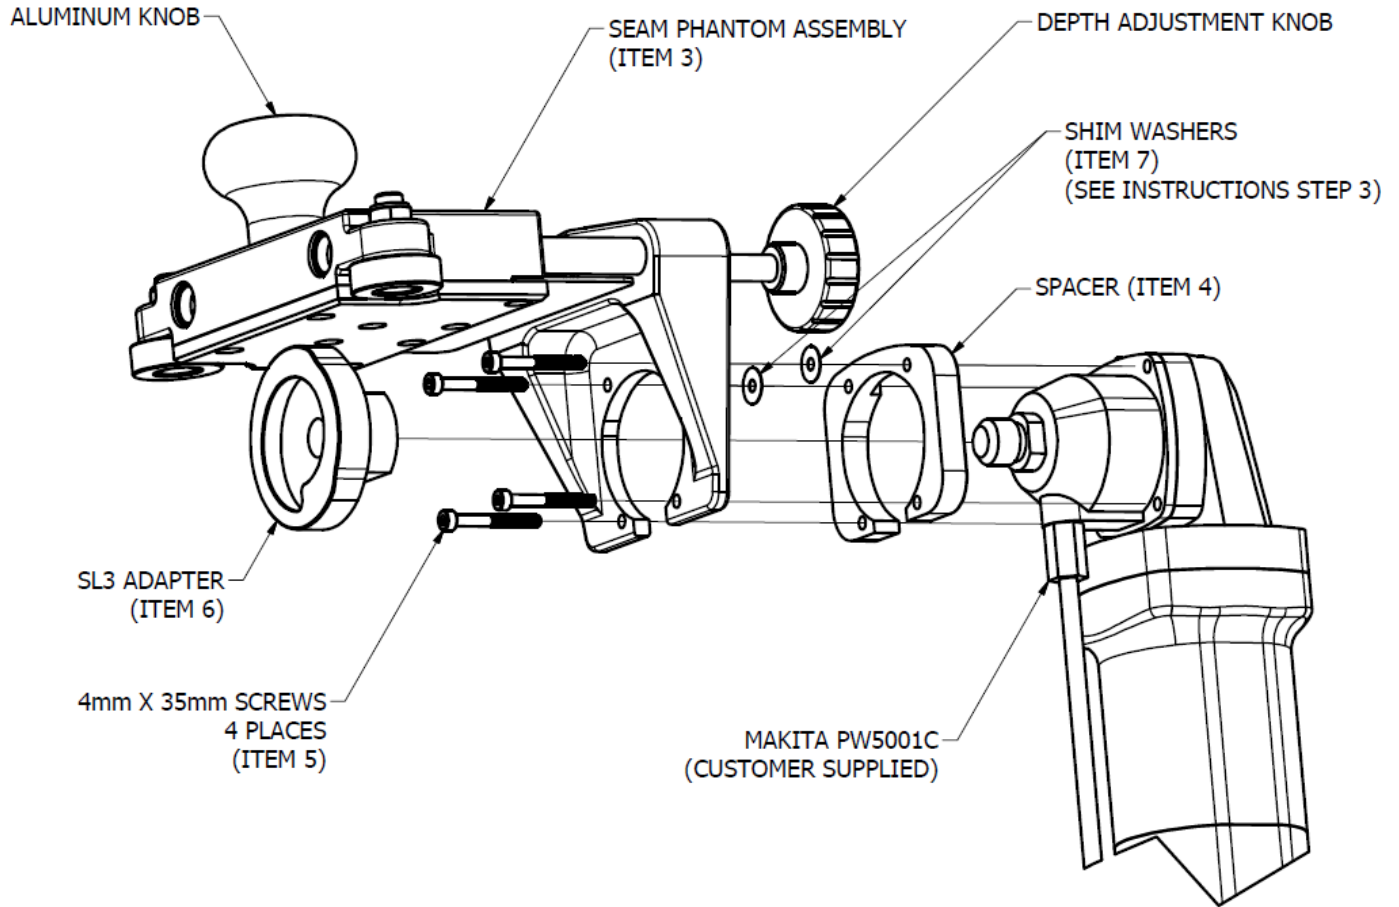


FIGURE 3 – Assembly Exploded View

3. Position Seam Phantom® (item 3) and Spacer (item 4), and attach to Polisher as shown in Figure 3 above using (4) 4mm X 35mm Hex Screws (item 5) supplied with Seam Phantom®. Insert shim washers (item 7) (optional) between Spacer and Seam Phantom® to adjust the angle of the grinding pad as noted below. Tighten using a 3mm Allen (Hex) wrench.

NOTE: See section titled **Adjusting the Seam Phantom®** on Page 6 for detailed instructions on use of the shim washers to get the best result.

4. Attach SL3® Adapter (item 6), tighten with crescent wrench and the unit is ready for use.

Adjusting the Seam Phantom®

To ensure the tightest possible seams, each Seam Phantom® is checked for squareness before it leaves the factory. Slight variations in polishers can affect the finished product so shim washers are provided to make final adjustments. A newly assembled Seam Phantom®/polisher should be tested and adjusted utilizing a sample seam ground on scrap stone as follows:

1. On a scrap piece of stone set up the Glide Guide and grind the first half of a finished seam per the instructions on page 8, 9 and 10 of this manual, steps 1, 2 and 4. Skip step 3, “Back Grind”. Dress the entire edge of the stone with the SL3® Turbo Pads to 150 grit. Make sure all the chips in the upper edge of the seam have been eliminated.
2. On a second scrap piece of stone create the mating half of the seam in the same way. Make sure all the chips in the upper edge of the seam have been eliminated.
3. Place the two halves of the finished seam together. Make sure the top of the sample is even and flat and observe the gap at the edge of the seam. The seam should be tight on the top edge. A slight gap on the bottom edge is acceptable and sometimes desirable. It is a matter of personal preference. Some fabricators prefer to make perpendicular tight seams from top to bottom. Other fabricators prefer a slight gap on the bottom to ensure the top is always tightest.
4. Add shim washers to the attachment screws, between the spacer and Seam Phantom®, as required to create the desired seam.
 - a) To correct a gap on the top edge, shim washers can be placed between the spacer and Seam Phantom® on the top two attachment screws. Utilize one or two washers on each screw as required. See Figure 3 for correct washer location.

NOTE: A single washer added to the top two attachment screws changes the angle of the SL3® Turbo Pad by approximately ¼ degree and will result in approximately .005” additional stone removed at the bottom of a 3cm sample (the approximate thickness of a human hair). This will correct an approximately .010” gap at the top of a finished seam when both halves are brought together.

- b) Shim washers may also be utilized on the lower two attachment screws to close an overly large gap on the lower edge of the seam.
5. After the washers have been added repeat the process to ensure the desired seams are being produced.
6. The Seam Phantom® is now set to produce consistent tight seams. Occasionally this process may need to be repeated as the plastic base plate that slides on the Glide Guide wears.

USE INSTRUCTIONS

Before Using the Seam Phantom® - Preparations

Before using the assembled Seam Phantom®, be sure to complete the following preparations.



1. Supply the specified voltage

Supply the voltage specified on the nameplate of the polisher. Otherwise damage could result to the polisher, or increase the risk of personal injury.



2. Install a Ground Fault Circuit Interrupter (GFCI)

WARNING: To prevent electrical shocks, be sure that the power circuit being used is protected by a functioning GFCI device, or be sure to install a ground fault circuit interrupter (GFCI) between the main power supply and the cord of the machine if one is not already present.



3. Organize the Work Area for Safe Operation

Before beginning operations, make sure that the work area conditions are well organized for safe operation of the Seam Phantom®.



4. Use Proper Safety Gear

To prevent damage to eyes from flying debris, wear protective glasses or face shield.
Be sure to wear waterproof safety boots and appropriate hearing protection.

How to Operate

NOTE: If you have access to the Internet, see <https://nsisolutions.com/seam-phantom-sub-page/> or <https://nsisolutions.com/resources/> for an instructional video as well as additional videos and resources related to this product.

1. Setup

Set your work piece on the work bench and secure it using appropriate clamps. Take care to leave enough overhang for the grinding pad to get all the way to the end of the slab, and for the guide rail clamps to clear the work bench.

NOTE: To allow for removing material, the seam should be “overcut” during the sawing process by as much as the largest chips in the upper edge.

2. Guide Setup

- a) Using your template or other method, determine final location for the seam. Mark with tape cut to the template or other preferred method.
- b) Use two gauge blocks to line up the Glide Guide straight edge parallel to the seam. See Figure 4 below.
- c) Your Glide Guide (guide rail) should extend a minimum of 3” (7.5 cm) past both sides of the stone. Make sure that you select the correct size Glide Guide for your work piece. A 48” Glide Guide is supplied with each kit and will work for most standard seams. 72” and 96” Glide Guides are also available.
- d) Clamp Glide Guide straight edge using appropriate clamps on the back edge (the edge opposite the seam) at each end.
- e) Remove gauge blocks after the glide guide is clamped in place and prior to grinding any stone.

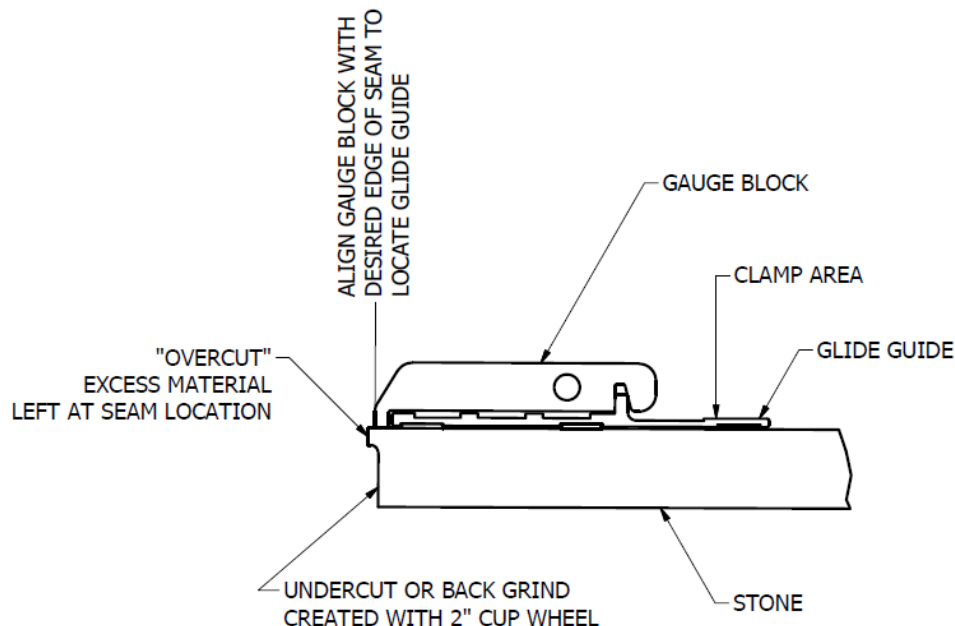


FIGURE 4 – Gauge Block Use

3. Back Grind or “Undercut”

The back grinding is done using the SL3® 2" cup wheel. Ensure adequate water flow is provided by adjusting the valve on the polisher. Lock the 2" cup wheel into the snail lock adapter and back grind slightly more material than you'll be dressing off with the turbo pads. Be sure to stop the back grind short of the front profiled or polished edge to avoid a large gap in the front edge. This back grind will allow the turbo pads to dress the upper portion of the seam more efficiently and will also provide a rough surface on the lower portion for the seaming adhesive to adhere to.



WARNING: The SL3® Cup Wheel is made to be used with water. Adjust the water valve to ensure an adequate water supply. DO NOT OVERHEAT the Cup Wheel by operating it dry. Max speed for the 2" Cup Wheel is 10,000 RPM.

4. Dressing the Seam (Suggested Process)

a) Start with either the SL3® 60 or 150 Grit Turbo Pad. Lock the desired turbo pad into the snail lock adapter.

NOTE: Which grit to start with will depend on the size of chips in the edge, and how much material is to be removed. Use the 60 grit to remove large chips and excess material. Use the 150 grit for smaller chips and fragile material.

b) Turn the adjustment knob counter clockwise to back the turbo pad off the stone so it's not touching the stone.

c) Turn on the power and water. Adjust the water valve to ensure an adequate water supply.



WARNING: The SL3® Turbo Pads are made to be used with water. Adjust the water valve to ensure an adequate water supply. DO NOT OVERHEAT the Turbo Pads by operating them dry. Max speed for the The SL3® Turbo Pads is 4,000 RPM.

d) Turn the adjustment knob clockwise until the turbo pad just touches the stone and begin grinding the seam back and forth keeping the wheels in contact with the vertical edge of the Glide Guide as shown in Figure 5.

e) Turn the adjustment knob in small increments to gradually cut deeper. Keep working the Seam Phantom® back and forth grinding away the stone until the cut is almost to the final seam location (stop short so you can finish with the 300 grit turbo).

NOTE: For best results, only apply pressure to the tool using aluminum knob above the flat surface of the straight edge. Do not apply pressure via the polisher or by pushing on the adjustment knob.

- f) Repeat process using 300 grit pad. (This is personal preference and depends on the type of material being dressed. You might find that your results from the 150 grit pad are sufficient.)
- g) Continue until finished edge is at the desired seam location with no edge chipping. Continuing until pad barely touches the stone along the entire edge will ensure a straight and chip free edge.

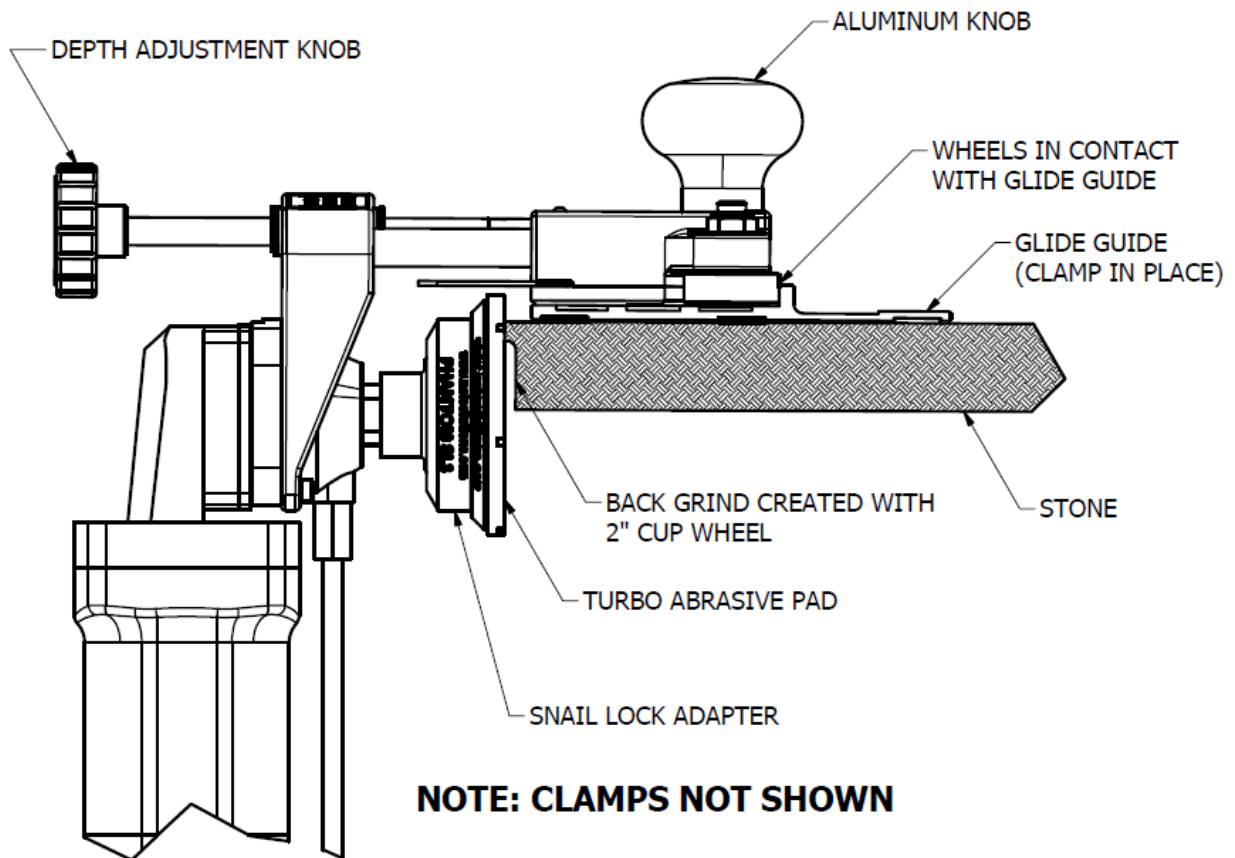


FIGURE 5 – Dressing the Seam

5. After Use

Clean and dry the electric polisher as noted in the Cleaning and Maintenance section.

CLEANING AND MAINTENANCE



CAUTION:

Always be sure that the polisher is switched off and unplugged before attempting to perform inspection or maintenance.

The polisher and its air vents have to be kept clean. Regularly clean the tool's air vents or whenever the vents start to become obstructed.

To maintain product SAFETY and RELIABILITY, repairs of the polisher should be done by an Authorized or Factory Service Center.

1. Blow Out Electric Polisher

Blow out polisher air vents after each use using a dry air supply to remove any dust or moisture. This will extend the life of the electric motor.

2. Cleaning Guide Rods and Bushings

After heavy use, the in and out adjustment of the Seam Phantom® may become "stiff". Performing the following steps should correct this. See Figure 6.

- a) Turn the adjustment knob counter clockwise until the adjustment screw disengages from the square nut and the two halves of the Seam Phantom® can be separated. Do not lose the square nut.
- b) Use a paper towel or other soft material and push through the bushing holes, sliding back and forth until all grit is removed.
- c) Using a soft towel or material, wipe the stainless shaft guide rods clean.
- d) Clean screw threads on the adjustment screw with water and a brush.
- e) Reassemble the two halves of the Seam Phantom®

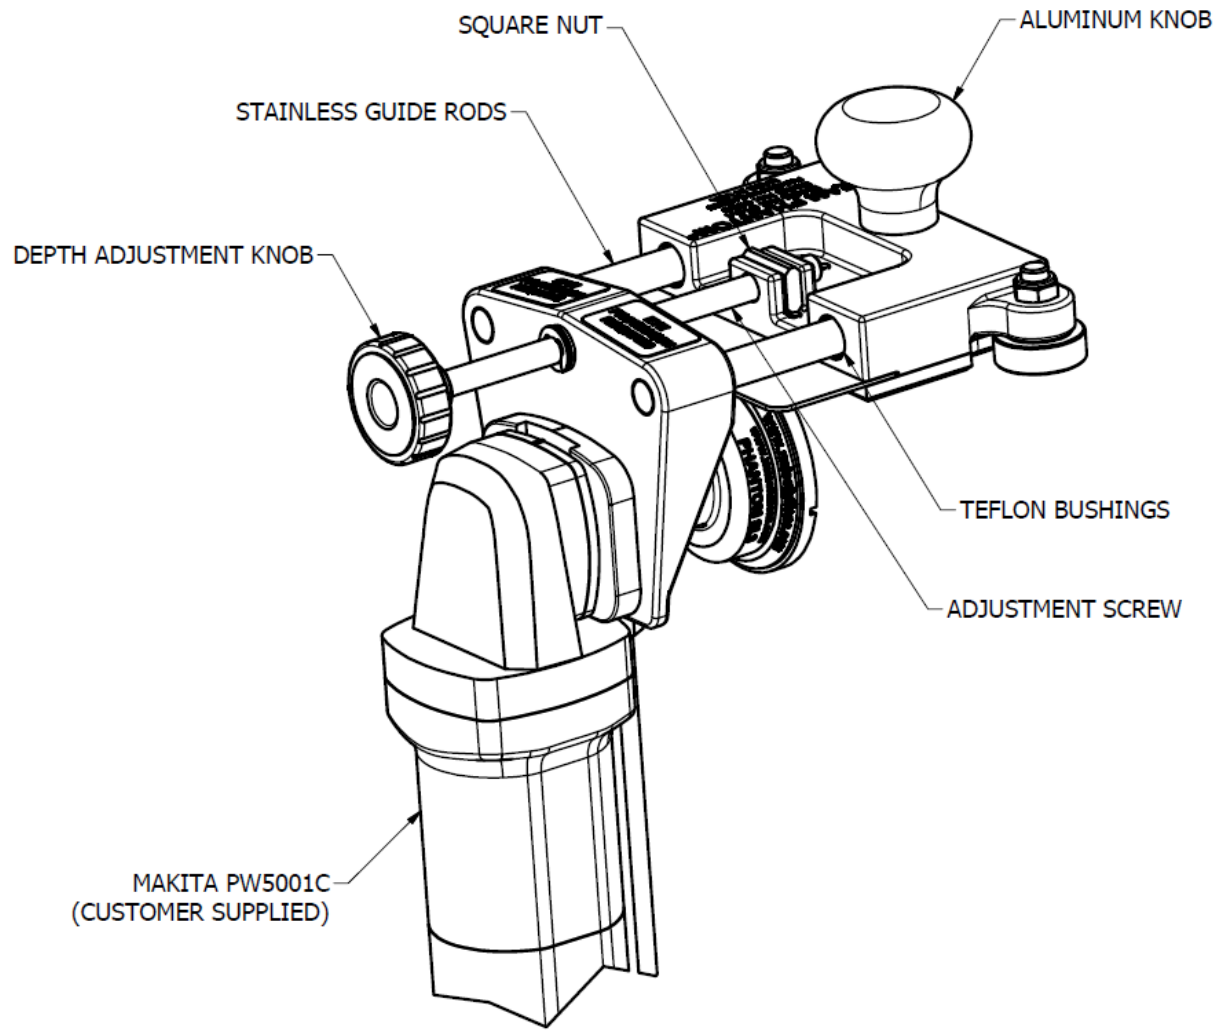


FIGURE 6 – Cleaning

CONTACT NSI SOLUTIONS

Whether it's for replacement parts, technical or usage support, or just to brag about how tight your seams are, feel free to contact us. For problems with the electric polisher, please contact the manufacturer direct for warranty replacement or work.

Here's how to reach us:

Main Phone: 425-297-3162

Web: www.nsisolutions.com

Email address: info@nsisolutions.com

Mail: 1205 8th DR
Mukilteo, WA 98275

Usage Tips: For usage help and/or tips:
- www.nsisolutions.com and go to the Seam Phantom® page or Resource Page (shown below) which includes FAQs:

<https://nsisolutions.com/seam-phantom-sub-page/>

<https://nsisolutions.com/resources/>

- www.stonefabricatorsalliance.com and search for "Seam Phantom" or ask your question in an appropriate forum.