

**INCORPORATING ELECTRONIC AUDIBILITY SYSTEM
COMPLETE WITH INDUCTION LOOP FACILITY**

DIMENSIONS:

STANDARD SIZE 1200 X 700 X 205mm W X D X H

STRUCTURAL OPENING REQUIRED 1210 X 210mm

DESIGNED TO FIT BELOW EXISTING OR
PROPOSED GLAZING

SUITABLE FOR EXTERNAL USE BUT A CANOPY IS
STRONGLY RECOMMENDED

SPECIFICATION:

STANDALONE TRANSACTION DRAWER WITH
BUILT IN ELECTRONIC AUDIBILITY SYSTEM
COMPLETE WITH INDUCTION LOOP FACILITY

STANDARD FINISH:

BRUSHED STAINLESS STEEL

DRAWER:

COMBINATION 75/135mm TRANSFER TRAYS,
PASSING SIZE 100 X 250 X 75mm (75mm TRAY)
/ 415 X 250 X 135mm (135mm TRAY)

FOR USE WHERE THE TRANSFER OF GOODS AND CASH
CAN BE UTILISED TOGETHER, THE 75mm TRAY ALSO
ALLOWS THE USE OF CREDIT/DEBIT CARD TERMINAL.

SUITABLE FOR PETROL STATION AND PHARMACY
OUT OF HOURS TRANSACTIONS AND OTHER
RETAIL OR TRADE OUT OF HOURS SALES
WHERE COMMUNICATION IS REQUIRED. IF
LARGER ITEMS ARE REQUIRED TO PASS CAN
ALSO BE USED IN CONJUNCTION WITH BTU UNITS.

OPERATION:

TRANSACTION DRAWER MANUALLY OPERATED,
DRAWER ABLE TO BE LOCKED IN CLOSED POSITION
BY PUSH TO LOCK, TURN KEY TO OPEN LOCK.
AUDIBILITY SYSTEM, FULLY DUPLEX SYSTEM WITH
INTERNAL DESK CONSOLE CONTROL UNIT.

INSTALLATION:

CAN BE INSTALLED IN VIRTUALLY ANY WALL
THICKNESS TO SUIT OPENING SIZE OF 1210 X 210mm.


UNIT IS SUPPLIED FULLY ASSEMBLED AND WITH
AUDIBILITY SYSTEM FACTORY BALANCED TO
SIMPLY PLUG INTO AN EXISTING 13AMP SOCKET.
EXTERNALLY THE UNIT HAS A 25mm FLANGE TO THE
TOP AND SIDES TO COVER ANY IRREGULARITIES IN
STRUCTURAL OPENING AND TO ALLOW THE UNIT
TO BE SEALED TO STRUCTURAL OPENING USING
SUITABLE MASTIC SEAL. THE UNIT IS SUPPLIED
WITH A PRE-DRILLED INTERNAL FIXING FLANGE
THAT IS SCREW FIXED TO THE BASE UNIT AND WALL
ALLOWING 50mm FOR ANY ADJOINING COUNTER
TOPS THAT MAY BE REQUIRED OR ARE EXISTING.
THE MAXIMUM RECOMMENDED GLAZING RAIL
DEPTH IS 100mm ALTHOUGH THICKER RAILS CAN
BE ACCOMMODATED BUT OPERATION OF THE
DRAWER UNIT IS THEN RESTRICTED AND PASSING
SIZE REDUCED.

OPTIONS:

STAINLESS STEEL SUPPORT LEGS

VISION PANELS

SUITABLE FOR EXTERNAL USE

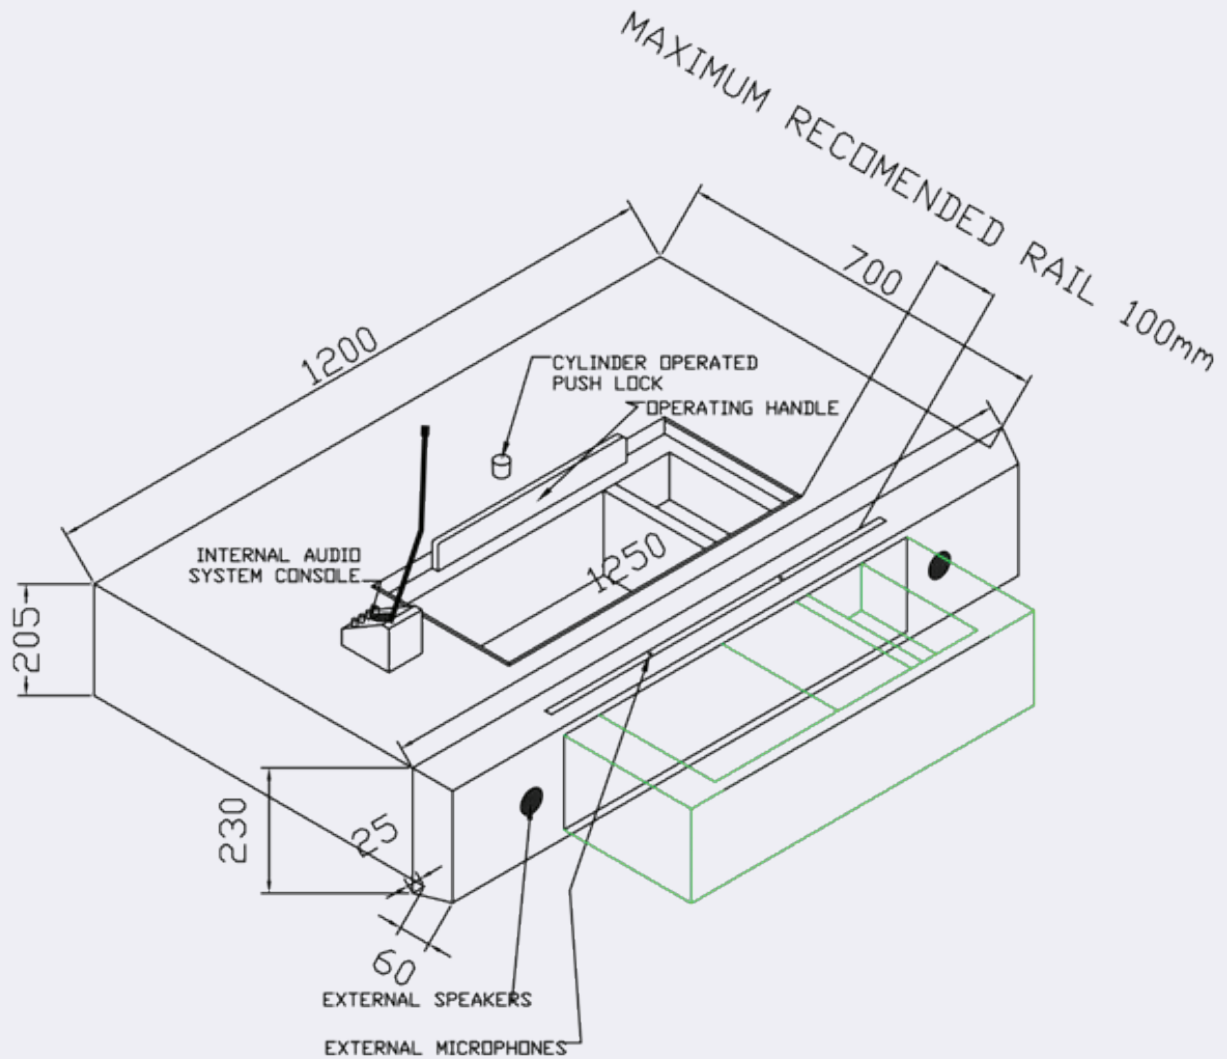

SUITABLE FOR EXTERNAL USE