

# AK LE Series

## High Flow Low Energy Brackish Water RO Elements

The A-Series family of proprietary thin-film reverse osmosis membrane is characterized by high flux and high sodium chloride rejection. AK LE brackish water elements are selected when high rejection, high flow and ultra-low operating pressures are desired.

The AK LE element is a low energy high flow element for beverage, light commercial, residential and general industrial applications. AK LE Series elements feature a Fiberglass outer wrap.

**Table 1: Element Specification**

Membrane	Thin-film membrane (TFM*)
----------	---------------------------

Model	Average permeate flow gpd (m3/day) <sup>1,2</sup>	Average NaCl rejection <sup>1,2</sup>	Minimum NaCl rejection <sup>1,2</sup>
AK-90 LE	2800 (10.6)	99.3%	99.0%
AK-400 LE	12300 (46.6)	99.3%	99.0%
AK-440 LE	13500 (51.1)	99.3%	99.0%

<sup>1</sup> Average salt rejection after 24 hours operation. Individual flow rate may vary +25%/-15%.

<sup>2</sup> Testing conditions: 500ppm NaCl solution at 115psi (793kPa) operating pressure, 77°F (25°C), pH7 and 15% recovery.


Model	Active area ft <sup>2</sup> (m <sup>2</sup> )	Outer wrap	Part number
AK-90 LE	90 (8.4)	Fiberglass	3056683
AK-400 LE	400 (37.2)	Fiberglass	3056684
AK-440 LE	440 (40.9)	Fiberglass	3056685

**Table 2: Operating and CIP parameters**


<b>Typical Operating Pressure</b>	110 psi (758 kPa)
<b>Typical Operating Flux</b>	10-20GFD (15-35LMH)
<b>Maximum Operating Pressure</b>	400 psi (2,758 kPa)
<b>Maximum Temperature</b>	Continuous operation: 122°F (50°C) Clean-In-Place (CIP): 122°F (50°C)
<b>pH range</b>	Optimum rejection: 7.0-7.5, Continuous operation 4.0-11.0, Clean-In-Place (CIP): 2.0-11.5
<b>Maximum Pressure Drop</b>	Over an element: 12 psi (83 kPa) Per housing: 50 psi (345 kPa)
<b>Chlorine Tolerance</b>	1,000+ ppm-hours, dechlorination recommended
<b>Feedwater<sup>3</sup></b>	NTU < 1 SDI < 5

<sup>3</sup>SDI is measured on a non-linear scale using a 0.45 micron filter paper. Additionally, finer colloids, particulates and microorganisms that pass through the filter paper and not measured in the SDI test, will potentially foul the RO element. For performance consistency and project warranty, please use Winflows projection software and consult your Filters with Membranes representative.

**Figure 1a: Element Dimensions Diagram – Male**

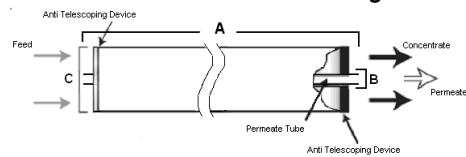

**Figure 1b: Element Dimensions Diagram – Female**

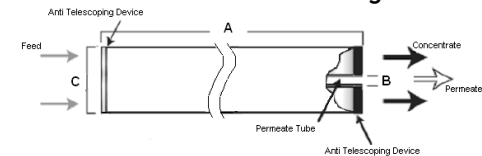

Find a contact near you by visiting [www.ge.com/water](http://www.ge.com/water) and clicking on "Contact Us".  
\* Trademark of General Electric Company; may be registered in one or more countries.

©2011, General Electric Company. All rights reserved.

**Table 3: Dimensions and Weights**

Model <sup>1</sup>	Type	Dimensions, inches (cm)			Boxed Weight lbs (kg)
		A	B <sup>2</sup>	C	
AK-90 LE	Male	40.0 (101.6)	0.75 (1.90)	3.9 (9.9)	9 (4)
AK-400 LE	Female	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)
AK-440 LE	Female	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)