

X-SCOPE

2000 X-RAY INSPECTION SYSTEM



X-Scope 2000 X-Ray Inspection System

The X-SCOPE 2000 X-Ray Inspection System is a full featured high-performance x-ray inspection instrument with an unbeatable price to performance ratio which includes all of the advanced features you would expect to find on a much more expensive x-ray inspection system.

Applications

- | | |
|---|---|
| <input checked="" type="checkbox"/> Multilayer PCBs | <input checked="" type="checkbox"/> Molded plastic |
| <input checked="" type="checkbox"/> BGA, QFN, wire bond, etc. | <input checked="" type="checkbox"/> Automotive assemblies |
| <input checked="" type="checkbox"/> Semiconductor | <input checked="" type="checkbox"/> Medical devices |
| <input checked="" type="checkbox"/> Over molded electrical connectors | <input checked="" type="checkbox"/> Pharmaceuticals |
| <input checked="" type="checkbox"/> Encapsulated components | <input checked="" type="checkbox"/> Ceramics |
| <input checked="" type="checkbox"/> Aluminum die casting | <input checked="" type="checkbox"/> Agriculture |



← **SCAN THIS CODE
WITH YOUR SMART PHONE**



System Details



FEATURING


- Fully integrated, 90kV high power closed micro-focus x-ray tube
- Spot size down to 5 μ
- 4"x3" high resolution CMOS digital flat panel image detector
- 50° detector tilt for oblique angle viewing
- 21.75" x 19.5" Inspection area
- Color mapping camera with zoom window provides easy location and identification of faults
- Z axis movement of the x-ray tube and detector
- Computer controlled kV and mA settings
- Computer controlled variable speed X-Y stage
- Simple point and click, intuitive GUI provides access to create advanced inspection routines

All software tools standard including (but not limited to)

- BGA Void detection and automatic calculations
- Easy macro recording for intuitive step and repeat programming
- Various measuring tools for radius, area, perimeter, etc.
- Industrial PC with Windows 7 PRO, 24" LCD flat panel display

PRODUCT SPECIFICATIONS

TOP SELLING X-RAY SYSTEM
PERFECT FOR SMT INSPECTION!

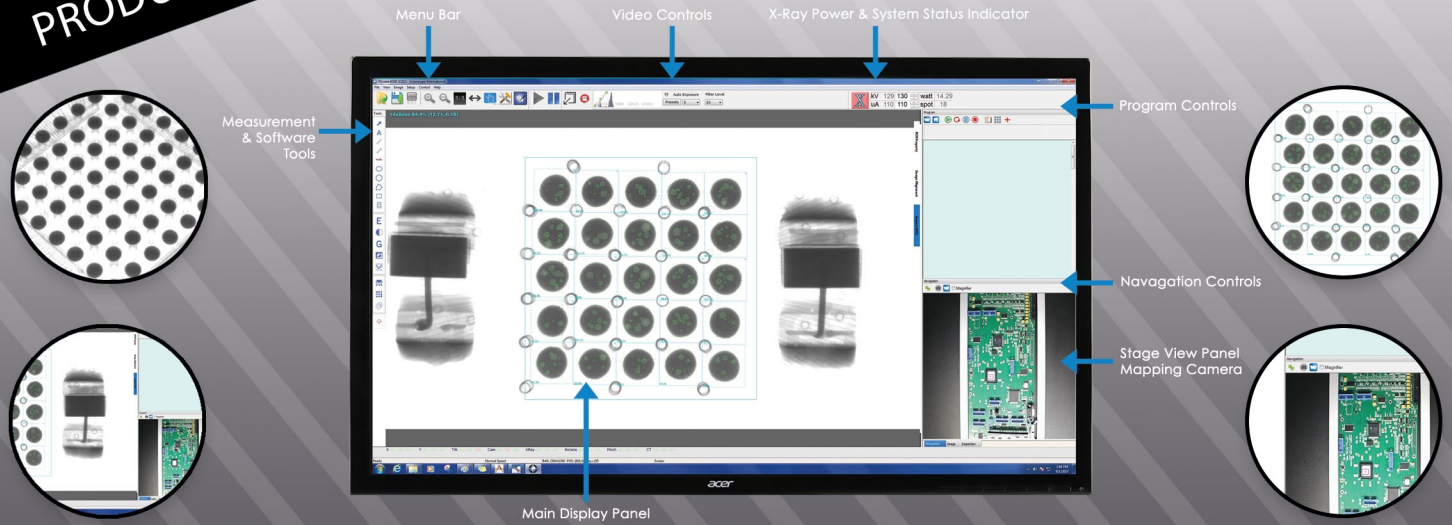

MACHINE SPECIFICATIONS

X-Ray Tube

- ✓ X-Ray Source: Micro-focus, integrated (closed)
- ✓ Operating voltage: 90kV
- ✓ Current: 0.178mA
- ✓ Minimum Focal Spot Size: 5 Micron
- ✓ Magnification up to: 1000x

Work Area

- ✓ Sample Table Size: 552mm x 496mm / 21.75" x 19.5"
- ✓ Inspection Area: 552mm x 496mm / 21.75" x 19.5"
- ✓ Oblique Angle View: ±50°

24/7 SERVICE HOTLINE
1(800)216-1800

THIS SYSTEM INCLUDES A 1 YEAR WARRANTY ON PARTS AND LABOR

Digital Flat Panel Detector

- ✓ Grayscale: 14 bit (16,384 shades of grayscale)
- ✓ Speed: 40FPS
- ✓ Resolution: 99µm
- ✓ Detector Size: 4" x 3" high resolution

General Machine Specs

- ✓ Dimensions: 55.5" x 53.5" x 66" (81" including light tower)
1358mm x 1358mm x 1677mm (2057mm including light tower)
- ✓ Weight: 1100kg /2425 lbs. (steel lead welded construction)
- ✓ Power: 110-230 VAC 50/60 Hz (auto switching)
- ✓ Industrial PC: Microsoft Windows 7 PRO (64-bit)

Compliance

THE SCIENSCOPE X-SCOPE X-RAY INSPECTION SYSTEMS MEET THE FDA-CDRH REGULATION CFR 21.1020.40 SUBCHAPTER J FOR CABINET X-RAY SYSTEMS. THE FDA-CDRH STANDARD FOR CABINET X-RAY SYSTEMS STATES THAT RADIATION EMISSIONS WILL NOT EXCEED 50 MICRO R/HR 5 CM FROM ANY EXTERNAL SURFACE. THE X-SCOPE X-RAY INSPECTION SYSTEMS TYPICALLY HAVE A RADIATION EMISSION READING OF LESS THAN 20 MICRO R/HR 5 CM FROM ANY EXTERNAL SURFACE. ALL SCIENSCOPE X-SCOPE X-RAY SYSTEMS HAVE A CE APPROVAL. SCIENSCOPE X-SCOPE X-RAY SYSTEMS ARE CLASSIFIED AS "CABINET X-RAY SYSTEMS" AND REQUIRE NO EXTERNAL RADIATION SHIELDING. WELDED STEEL / LEAD-STEEL CONSTRUCTION, NO VISIBLE SHIELDING.

FDA ACCESSION NUMBER: 0710198

CE REFERENCE NUMBER: CN.CE.0402-05.09

