

# Mass Flow Meter



High-accuracy, multi-parameter  
flow measurement in real time

Accurate  
Repeatable  
Durable



**M-4000SLPM**  
for flows as high as 4800 slpm

**M-0.5SCCM**  
for flows as low as 2.5 sllm

The Fastest Flow Controller Company in the World!



[alicat.com/meter](http://alicat.com/meter)

## MW Series with low pressure drop


(shown with optional  
color display)



## MS Series for aggressive gases

(shown with optional  
15-pin connector)

## MB Series rechargeable battery

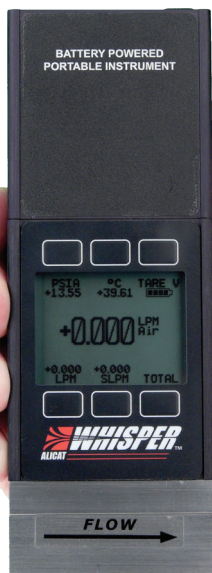

See the video!



# Mass Flow Meters

**Accurate in every situation!** Monitor mixed gases in changing process conditions.

## Making You Faster

- **5-ms speed of response.**
- **No warm-up required:** ready to measure in one second.
- **Stand-alone unit:** use with or without a computer or PLC.
- **All flow data** visible on one screen (flow, pressure, temp).
- **Digital and analog outputs.**

## Quick Specs

**Accuracy:** 0.8% of the reading (0.4% optional) + 0.2% full-scale repeatability, NIST-traceable.  
**Linear range:** 0.5-100% of full scale (200:1), for any range from 0-0.5 sccm to 0-4000 slpm.  
**Multi-gas calibration:** 98-130 gases preloaded, plus COMPOSER™ gas composition firmware.  
**Lifetime warranty:** unaffected by bumps, humidity or changes in orientation.

## Tailored for You

### MW Low Pressure Drop

Measure with minimal affect on pressure or volumetric flow rates and even faster fluidic response. Max range: 0-500 slpm.

### MS Anti-Corrosive

Withstand corrosion caused by aggressive gases with durable 316L stainless steel.

### MB Portable

Rechargeable battery provides 18 hours of operation for easy flow verification.

### Common Options:

**Bidirectional Flow Calibration** enables full-scale readings in both flow directions.  
**Integrated Flow Totalizer** provides cumulative readings of total quantity flowed over time.  
**Backlit Color Display** shines in low lighting.  
**CSA Class 1 Div 2 (ATEX Zone 2) Classification** permits operation in hazardous environments.  
**Weatherproof, watertight enclosure (IP67)** for operation in outdoor or dusty environments.

### L Liquid Flows

Measure liquid flows with the fastest response time available in a liquid flow meter (20 ms). Available in ranges from 0-0.5 ccm to 0-10 lpm.

## Sample Application

### Faster Leak Testing

Accurately measure leak rates as low as 2.5 microliters per minute with repeatable results. With pressure precisely regulated at the device under test, an Alicat mass flow meter reveals device leak-through rates in real time.

