

TW/510

Features

Our DN117/4.6 Twin-Wall™ deck pipe features a 5.1mm wear resistant pipe liner and 2.0mm steel shell, with the ends having a chrome carbide liner to protect the pipe against excessive wear

Specifications

Heat Treatment

System

Wall Thickness

Hardness

Induction Hardened

DN117/4.6

5.1mm + 2.0mm

Up to 68HRc

Working Pressure

Pipe Weight

FWC Weight

85 bar (1233psi)

14.6 lbs/ft (21.7 kg/m)


32.2 lbs/ft (47.9 kg/m)

Complete System

- Twin-Wall™ Boom Pipe
- Twin-Wall™ Elbows
- Twin-Wall™ Reducers
- CCI-Lined Elbows
- CCI-Lined Reducers
- CCI-Lined Backend Kit

Twin-Wall™ Deck Pipe (5.1mm + 2.0mm)
with chrome carbide insert (CCI) weld ends

Length (in)	Length (mm)	Approx. Shipping Weight (lbs / Kg)	Part Number
39.37	1000	48 / 22	B46XW3937M
78.75	2000	96 / 44	B46XW7875M
118.12	3000	144 / 65	B46XWB812M
157.50	4000	192 / 87	B46XWF750M
Make up length (consult factory)			B46XW ___ M
Other lengths are available upon request. Consult Factory			

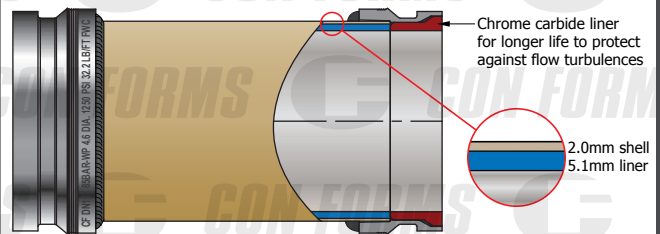

800-223-3676



CONFORMS.COM

